

STATE OF MISSOURI
DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION



MISSOURI STATE OPERATING PERMIT

In compliance with the Missouri Clean Water Law, (Chapter 644 R.S. Mo. as amended, hereinafter, the Law), and the Federal Water Pollution Control Act (Public Law 92-500, 92nd Congress) as amended,

| | |
|---------------------------------|--------------------------------------|
| Permit No. | MO- 0139297 |
| Owner: | Mid-States Specialty Eggs, LLC |
| Address: | 30911 Highway HH, Smithton, MO 65350 |
| Continuing Authority: | Same as above |
| Address: | Same as above |
| Facility Name: | Mid-States Specialty Eggs |
| Facility Address: | 30911 Highway HH, Smithton, MO 65350 |
| Legal Description: | See Page 2 |
| UTM Coordinates: | See Page 2 |
| Receiving Stream: | See Page 2 |
| First Classified Stream and ID: | See Page 2 |
| USGS Basin & Sub-watershed No.: | See Page 2 |

is authorized to discharge from the facility described herein, in accordance with the effluent limitations and monitoring requirements as set forth herein:

FACILITY DESCRIPTION

Industrial Facility – SIC #2054

See page 2.

This permit authorizes only land application of wastewater and sludge under the Missouri Clean Water Law and the National Pollutant Discharge Elimination System; it does not apply to other regulated areas. This permit may be appealed in accordance with Section 644.051.6 of the Law.

March 1, 2020

Effective Date

Edward B. Galbraith, Director, Division of Environmental Quality

February 28, 2025

Expiration Date

Chris Wieberg, Director, Water Protection Program

FACILITY DESCRIPTION (CONTINUED)

PERMITTED FEATURE #001 – Holding Basin

Egg washing process wastewater and domestic waste. Pretreatment cell/ Treatment lagoon / wastewater is irrigated to the surface/sludge is retained in lagoon.

| | |
|--|---|
| Legal Description: | SE ¼, SE ¼, Sec.16, T46N, R20W, Pettis County |
| UTM Coordinates: | X = 489935, Y = 4289698 |
| Receiving Stream: | Tributary to 8-20-13 MUDD V1.0 |
| 1 st Classified Stream: | 8-20-13 MUDD V1.0 (C) (3960) |
| USGS Basin & Sub-watershed No.: | 10300103-0407 |
| Design Flow, Dry Weather (gallons per day): | 20,000 |
| Design Flow, 1-in-10 Year Wet Weather (gallons per day): | 26,000 |

Pretreatment Cell:

| | |
|--|---------|
| Total Depth (feet): | 7 |
| Maximum Operating Depth (feet): | 5 |
| Maximum Operating Storage Volume (gallons): | 335,900 |
| Storage Capacity, 1-in-10 Year Wet Weather (days): | 12 |

Treatment Cell:

| | |
|--|-----------|
| Total Depth (feet): | 11 |
| Maximum Operating Depth (feet): | 9 |
| Total Volume (gallons): | 5,838,626 |
| Maximum Operating Storage Volume (gallons): | 3,115,906 |
| Storage Capacity, 1-in-10 Year Wet Weather (days): | 120 |

PERMITTED FEATURE #002 – Land Application Site- 62.9 acres.

| | |
|------------------------------------|---|
| Legal Description: | NE ¼, SW ¼, Sec.16, T46N, R20W, Pettis County |
| UTM Coordinates: | X = 4890793, Y = 4289871 |
| Receiving Stream: | Tributary to Olive Branch |
| 1 st Classified Stream: | Olive Branch (C) (3504) |
| USGS Basin & Sub-watershed No.: | 10300103-0407 |

Wastewater

| | |
|---------------------------------------|--|
| Application Rate Basis: | Hydraulic Loading |
| Crops and Vegetation: | Pasture |
| Equipment Type: | Tank spray |
| Field Slopes (%): | <10% |
| Application Rates (varied per acre): | 0.2 inch/day; 3 inches/week; 24 inches/year |
| Irrigation Volume (gallons per year): | 5,401,440 at design loading (including 1-in-10 year flows) |
| Irrigation Areas (acres): | 62 acres at design loading (383 acres total available) |

Domestic Sludge is addressed in Standard Conditions Part III and shall be handled, treated, and disposed of in accordance with those standard conditions.

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

| PERMITTED FEATURE #001 <i>no discharge wastewater basin</i> | TABLE A-1 STORAGE BASIN MONITORING REQUIREMENTS | | | | |
|--|--|-------------------------|--------------------|--------------------------|----------------|
| The permittee is not authorized to discharge from this feature. The final requirements shall become effective on March 1, 2020 and remain in effect until expiration of the permit. This feature shall be monitored and operationally controlled by the permittee as specified below: | | | | | |
| MONITORING REQUIREMENTS | UNITS | MONITORING REQUIREMENTS | | | |
| | | DAILY MAXIMUM | MONTHLY AVERAGE | MEASUREMENT FREQUENCY | SAMPLE TYPE |
| Limit Set: M | | | | | |
| STORAGE BASINS MONITORING | | | | | |
| Freeboard Φ | Feet | * | | once/month | measured |
| Precipitation | Inches | * | | once/month | measured |
| MONITORING REPORTS SHALL BE SUBMITTED <u>MONTHLY</u> ; THE FIRST REPORT IS DUE <u>APRIL 28, 2020</u> . NO DISCHARGE IS AUTHORIZED FROM THIS PERMITTED FEATURE. | | | | | |
| Limit Set: IW | | | | | |
| LAND APPLIED WASTEWATER (¥, Ψ) | | | | | |
| Nitrate Nitrogen as N | mg/L | * | | once/year | grab |
| Ammonia Nitrogen as N | mg/L | * | | once/year | grab |
| Nitrogen, Total Kjeldahl | mg/L | * | | once/year | grab |
| Total Phosphorus as P | mg/L | * | | once/year | grab |
| pH | SU | * | | once/year | grab |
| Oil and Grease | mg/L | * | | once/year | grab |
| Total Suspended Solids | mg/L | * | | once/year | grab |
| MONITORING REPORTS SHALL BE SUBMITTED <u>ANNUALLY</u> ; THE FIRST REPORT IS DUE <u>JANUARY 28, 2021</u> . . NO DISCHARGE IS AUTHORIZED FROM THIS PERMITTED FEATURE. | | | | | |

| PERMITTED FEATURE #002 | TABLE A-2 LAND APPLICATION FIELD MONITORING REQUIREMENTS | | | | |
|--|---|-------------------------|--------------------|--------------------------|----------------|
| The permittee is not authorized to discharge from this feature. The final requirements shall become effective on March 1, 2020 and remain in effect until expiration of the permit. This feature shall be monitored and operationally controlled by the permittee as specified below: | | | | | |
| MONITORING REQUIREMENTS | UNITS | MONITORING REQUIREMENTS | | | |
| | | DAILY MAXIMUM | MONTHLY AVERAGE | MEASUREMENT FREQUENCY | SAMPLE TYPE |
| Limit Set: LA | | | | | |
| WASTEWATER APPLICATION X | | | | | |
| Application Area | Acres | * | | once/day | measured |
| Application Rate | Inches/Acre | * | | once/day | measured |
| Irrigation Period | Hours | * | | once/day | measured |
| Volume Irrigated | Gallons | * | | once/day | measured |
| MONITORING REPORTS SHALL BE SUBMITTED <u>BY THE 28TH DAY OF THE MONTH FOLLOWING LAND APPLICATION.</u> NO DISCHARGE IS AUTHORIZED FROM LAND APPLICATION FIELDS. | | | | | |

- * Monitoring requirement only
- Φ Storage Basin freeboard shall be reported as Storage Basin water level in feet below the overflow level.
- ¥ Report as “No Application” when land application does not occur during the report period.
- Ψ Wastewater that is land applied shall be sampled at the irrigation pump, wet well, or application equipment prior to land application.
- Χ Reporting is only required for permitted features where land application occurred during the month. If no land application occurs at a permitted feature, no reporting is required. These are unscheduled parameters.
- △ Report the minimum value obtained if more than one sample was taken.

B. STANDARD CONDITIONS

In addition to specified conditions stated herein, this permit is subject to the attached Part I and Part III standard conditions dated August 1, 2014 and August 1, 2019, respectively, and hereby incorporated as though fully set forth herein.

C. SPECIAL CONDITIONS

1. This permit does not authorize the discharge of wastewater or sludge.
2. Unauthorized Discharges.
 - (a) Discharges, spills, or overflows for any reason shall constitute a permit violation and shall be reported in accordance with Standard Conditions Part 1 Section B.2. Unauthorized discharges are to be reported to the Northeast Regional Office during normal business hours or the Environmental Emergency Response spill-line at 573-634-2436 outside of normal business hours within 24 hours of becoming aware of the discharge.
 - (b) Monitoring. Any unauthorized discharge shall be monitored for the parameters in the table below at least once during the discharge event. Additional monitoring may be required by the Department on a case-by-case basis. The facility shall submit test results, along with the number of days the storage basin(s) has discharged during the month, via the Electronic Discharge Monitoring Report (eDMR) Submission System by the 28th day of the month after the discharge ceases. Permittee shall monitor for the following constituents:

| Constituent | Units |
|--|---------|
| Effluent Flow | MGD |
| Flow | Hours |
| Biochemical Oxygen Demand ₅ | mg/L |
| Dissolved Oxygen | mg/L |
| Total Suspended Solids | mg/L |
| Ammonia as N | mg/L |
| pH – Units | SU |
| Oil & Grease | mg/L |
| E. coli* | #/100mL |

*Sampling for E. coli is only required during the recreational months of April – October.

- (c) If the unauthorized discharge was from an overflow from a no-discharge wastewater basin, the report must include all records confirming operation and maintenance records documenting proper maintenance in accordance with condition (d) below.
 - (d) Permittee shall adhere to the following minimum Best Management Practices (BMPs) for no-discharge wastewater holding structures:
 - i. To prevent unauthorized discharges, the no-discharge wastewater basin must be properly operated and maintained to contain all wastewater plus run-in and direct precipitation. During normal weather conditions, the liquid level in the storage structure shall be maintained below the upper operating level, so that adequate storage capacity is available for use during adverse weather periods. The liquid level in the storage structure should be lowered on a routine schedule based on the design storage period. Typically this should be accomplished prior to expected seasonal wet and winter climate periods. Maintain liquid level in the no-discharge wastewater structure at least 2.0 feet from the bottom of the discharge pipe, top of the basin, or the bottom of the overflow canal, whichever is lower.
 - ii. Weekly inspection of no-discharge wastewater basins shall occur. Inspection notes will be kept at the facility and made available to the Department upon request.
 - iii. The inspections will note any issues with the no-discharge structure and will record the level of liquid as indicated by the depth marker.
3. Electronic Discharge Monitoring Report (eDMR) Submission System.
The permittee shall submit an eDMR Permit Holder and Certifier Registration form within **30 days** of the effective date of this permit. Per 40 CFR Part 127 National Pollutant Discharge Elimination System (NPDES) Electronic Reporting Rule, reporting of effluent limits and monitoring shall be submitted by the permittee via an electronic system to ensure a timely, complete, accurate, and nationally-consistent set of data. Visit <http://dnr.mo.gov/pubs/pub2474.pdf> to access the Facility Participation Package which contains the eDMR Permit Holder and Certifier Registration form.

C. SPECIAL CONDITIONS (continued)

Once the permittee is activated in the eDMR system:

- (a) Discharge Monitoring Reporting Requirements. The permittee must electronically submit compliance monitoring data via the eDMR system. In regards to Standard Conditions Part I, Section B, #7, the eDMR system is currently the only Department approved reporting method for this permit.
- (b) Programmatic Reporting Requirements. The following reports (if required by this permit) must be electronically submitted as an attachment to the eDMR system until such a time when the current or a new system is available to allow direct input of the data:
 - (1) Wastewater Irrigation Annual Reports;
 - (2) Any additional report required by the permit excluding bypass reporting.After such a system has been made available by the department, required data shall be directly input into the system by the next report due date.
- (c) Other actions. The following shall be submitted electronically after such a system has been made available by the department:
 - (1) General Permit Applications/Notices of Intent to discharge (NOIs);
 - (2) Notices of Termination (NOTs); and
 - (3) No Exposure Certifications (NOEs);
- (d) Electronic Submissions. To access the eDMR system, use the following link in your web browser: <https://edmr.dnr.mo.gov/edmr/E2/Shared/Pages/Main/Login.aspx>.
- (e) Waivers from Electronic Reporting. The permittee must electronically submit compliance monitoring data and reports unless a waiver is granted by the department in compliance with 40 CFR Part 127. The permittee may obtain an electronic reporting waiver by first submitting an eDMR Waiver Request Form: <http://dnr.mo.gov/forms/780-2692-f.pdf>. The department will either approve or deny this electronic reporting waiver request within 120 calendar days. Only permittees with an approved waiver request may submit monitoring data and reports on paper to the Department for the period that the approved electronic reporting waiver is effective.

4. Reporting of Non-Detects:

- (a) An analysis conducted by the permittee or their contracted laboratory shall be conducted in such a way that the precision and accuracy of the analyzed result can be enumerated.
- (b) The permittee shall not report a sample result as “Non-Detect” without also reporting the detection limit of the test. Reporting as “Non-Detect” without also including the detection limit will be considered failure to report, which is a violation of this permit.
- (c) The permittee shall report the “Non-Detect” result using the less than sign and the minimum detection limit (e.g. <10).
- (d) Where the permit contains a Minimum Level (ML) and the permittee is granted authority in the permit to report zero in lieu of the < ML for a specified parameter (conventional, priority pollutants, metals, etc.), then zero (0) is to be reported for that parameter.
- (e) See Standard Conditions Part I, Section A, #4 regarding proper detection limits used for sample analysis.
- (f) When calculating monthly averages, one-half of the minimum detection limit (MDL) should be used instead of a zero. Where all data are below the MDL, the “<MDL” shall be reported as indicated in item (C).

5. Hazardous waste regulated under the Missouri Hazardous Waste Law and regulations shall not be land applied under this permit.

6. Release of a hazardous substance must be reported to the department in accordance with 10 CSR 24-3.010. A record of each reportable spill shall be retained with the permit and made available to the department upon request.

7. An all-weather access road shall be provided to the treatment facility.

8. Failure to pay fees associated with this permit is a violation of the Missouri Clean Water Law (644.055 RSMo).

9. This permit does not cover land disturbance activities.

10. The purpose of the Stormwater Pollution Prevention Plan (SWPPP) and the Best Management Practices (BMPs) listed herein is the prevention of pollution of waters of the state. A deficiency of a BMP means it was not effectively preventing pollution [10 CSR 20-2.010(56)] of waters of the state, and corrective actions means the facility took steps to eliminate the deficiency.

C. SPECIAL CONDITIONS (continued)

11. Stormwater Pollution Prevention Plan (SWPPP).

The facility's SIC code or description is found in 40 CFR 122.26(b)(14) and/or 10 CSR 20-6.200(2) and hence shall implement a Stormwater Pollution Prevention Plan (SWPPP) which must be prepared and implemented upon permit effective date. The SWPPP must be kept on-site and should not be sent to the Department unless specifically requested. The SWPPP must be reviewed and updated annually or if site conditions affecting stormwater change. The permittee shall select, install, use, operate, and maintain the Best Management Practices prescribed in the SWPPP in accordance with the concepts and methods described in: *Developing Your Stormwater Pollution Prevention Plan, A Guide for Industrial Operators*, (EPA 833-B-09-002) published by the EPA in 2015 https://www.epa.gov/sites/production/files/2015-11/documents/swppp_guide_industrial_2015.pdf The purpose of the SWPPP and the Best Management Practices (BMPs) listed herein is the prevention of pollution of waters of the state. A deficiency of a BMP means it was not effective at preventing pollution [10 CSR 20-2.010(56)] to waters of the state. Corrective action describes the steps the facility took to eliminate the deficiency.

The SWPPP must include:

- (a) A listing of specific contaminants and their control measures (or BMPs) and a narrative explaining how BMPs are implemented to control and minimize the amount of contaminants potentially entering stormwater.
- (b) A map with all outfalls and structural BMPs marked.
- (c) A schedule for at least once per month site inspections and brief written reports. The inspection report must include precipitation information for the entire period since last inspection, as well as observations and evaluations of BMP effectiveness. Throughout coverage under this permit, the facility must perform ongoing SWPPP review and revision to incorporate any site condition changes.
 - i. Operational deficiencies must be corrected within seven (7) calendar days.
 - ii. Minor structural deficiencies must be corrected within fourteen (14) calendar days.
 - iii. Major structural deficiencies (deficiencies projected to take longer than 14 days to correct) must be reported as an uploaded attachment through the eDMR system with the DMRs. The initial report shall consist of the deficiency noted, the proposed remedies, the interim or temporary remedies (including proposed timing of the placement of the interim measures), and an estimate of the timeframe needed to wholly complete the repairs or construction. If required by the Department, the permittee shall work with the regional office to determine the best course of action. The permittee should consider temporary structures to control stormwater runoff. The facility shall correct the major structural deficiency as soon as reasonably achievable.
 - iv. All actions taken to correct the deficiencies shall be included with the written report, including photographs, and kept with the SWPPP. Additionally, corrective action of major structural deficiencies shall be reported as an uploaded attachment through the eDMR system with the DMRs.
 - v. BMP failure causing discharge through an unregistered outfall is considered an illicit discharge and must be reported in accordance with Standard Conditions Part I.
 - vi. Inspection reports must be kept on site with the SWPPP and maintained for a period of five (5) years. These must be made available to Department personnel upon request. Electronic versions of the documents and photographs are acceptable.
- (d) A provision for designating an individual to be responsible for environmental matters and a provision for providing training to all personnel involved in housekeeping, material handling (including but not limited to loading and unloading), storage, and staging of all operational, maintenance, storage, and cleaning areas. Proof of training shall be submitted upon request by the Department.

12. This permit stipulates pollutant benchmarks applicable to your discharge. The benchmarks do not constitute direct numeric effluent limitations; therefore, a benchmark exceedance alone is not a permit violation. Benchmark monitoring and visual inspections shall be used to determine the overall effectiveness of SWPPP and to assist you in knowing when additional corrective action may be necessary to protect water quality. If a sample exceeds a benchmark concentration you must review your SWPPP and your BMPs to determine what improvements or additional controls are needed to reduce that pollutant in your stormwater discharge(s).

Any time a benchmark exceedance occurs a Corrective Action Report (CAR) must be completed. A CAR is a document that records the efforts undertaken by the facility to improve BMPs to meet benchmarks in future samples. CARs must be retained with the SWPPP and available to the Department upon request. If the efforts taken by the facility are not sufficient and achieved. Failure to take corrective action to address a benchmark exceedance and failure to make measureable progress towards achieving the benchmarks is a permit violation.

13. The purpose of the Best Management Practices listed herein is the prevention of pollution of waters of the state. A deficiency of a BMP means it was not effective in preventing pollution [10 CSR 20-2.010(56)] of waters of the state, and corrective actions means the facility took steps to eliminate the deficiency.

C. SPECIAL CONDITIONS (continued)

14. Site-wide minimum Best Management Practices (BMPs). At a minimum, the permittee shall adhere to the following:
 - (a) Prevent the spillage or loss of fluids, oil, grease, fuel, etc. from vehicle maintenance, equipment cleaning, or warehouse activities and thereby prevent the contamination of storm water from these substances.
 - (b) Provide collection facilities and arrange for proper disposal of waste products including but not limited to petroleum waste products, and solvents.
 - (c) Store all paint, solvents, petroleum products and petroleum waste products (except fuels), and storage containers (such as drums, cans, or cartons) so that these materials are not exposed to storm water or provide other prescribed BMPs such as plastic lids and/or portable spill pans to prevent the commingling of storm water with container contents. Commingled water may not be discharged under this permit. Provide spill prevention control, and/or management sufficient to prevent any spills of these pollutants from entering waters of the state. Any containment system used to implement this requirement shall be constructed of materials compatible with the substances contained and shall also prevent the contamination of groundwater.
 - (d) Provide good housekeeping practices on the site to keep trash from entry into waters of the state.
 - (e) Provide sediment and erosion control sufficient to prevent or control sediment loss off of the property. This could include the use of straw bales, silt fences, or sediment basins, if needed, to comply with effluent limits.
 - (f) Prevent pesticide spills or discharges from any point source by complying with the requirements of Federal Insecticide, Fungicide and Rodenticide Act, as amended (7 U.S.C. 136 et. seq.) and the use of such pesticides shall be in a manner consistent with its label.
15. Water accumulated in secondary containment areas can be land applied, so long as the presence of hydrocarbons will not cause an exceedance of applied oils and greases values listed in D. Land Application System Condition 11(c). Records of all testing and treatment, including land application, of water accumulated in secondary containment shall be maintained on site and made available to the department upon request.
16. Changes in Discharges of Toxic Pollutant
In addition to the reporting requirements under §122.41(1), all existing manufacturing, commercial, mining, and silvicultural dischargers must notify the Director as soon as they know or have reason to believe:
 - (a) That an activity has occurred or will occur which would result in the discharge, on a routine or frequent basis, of any toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following notification levels:
 - (1) One hundred micrograms per liter (100 µg/L);
 - (2) Two hundred micrograms per liter (200 µg/L) for acrolein and acrylonitrile;
 - (3) Five hundred micrograms per liter (500 µg/L) for 2,4-dinitrophenol and for 2-methyl-4, 6-dinitrophenol;
 - (4) One milligram per liter (1 mg/L) for antimony;
 - (5) Five (5) times the maximum concentration value reported for the pollutant in the permit application in accordance with 40 CFR 122.21(g)(7); or
 - (6) The notification level established by the Department in accordance with 40 CFR 122.44(f).
 - (b) That any activity has occurred or will occur which would result in any discharge, on a non-routine or infrequent basis, of a toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following "notification levels":
 - (1) Five hundred micrograms per liter (500 µg/L);
 - (2) One milligram per liter (1 mg/L) for antimony;
 - (3) Ten (10) times the maximum concentration value reported for that pollutant in the permit application in accordance with §122.21(g)(7).
 - (4) The level established by the Director in accordance with §122.44(f).
17. The full implementation of this operating permit, which includes implementation of any applicable schedules of compliance, shall constitute compliance with all applicable federal and state statutes and regulations in accordance with §644.051.16, RSMo, and the CWA section 402(k); however, this permit may be reopened and modified, or alternatively revoked and reissued to comply with any applicable effluent standard or limitation issued or approved under Sections 301(b)(2)(C) and (D), §304(b)(2), and §307(a) (2) of the Clean Water Act, if the effluent standard or limitation so issued or approved contains different conditions or is otherwise more stringent than any effluent limitation in the permit; or controls any pollutant not limited in the permit.
18. All permitted features, including emergency outfalls, must be clearly marked in the field. The permitted features and land application fields shall also be marked on the aerial or topographic site map included with the Operation and Maintenance manual.

C. SPECIAL CONDITIONS (continued)

19. The permittee shall develop, maintain and implement an Operation and Maintenance (O&M) Manual that includes all necessary items to ensure the operation and integrity of the waste handling and land application systems, including key operating procedures, an aerial or topographic site map with the permitted features, land application fields, and irrigation buffer zones marked, and a brief summary of the operation of the facility. The O & M manual shall be made available to the operator and available to the department upon request. The O&M Manual shall be reviewed and updated at least every five years.

D. LAND APPLICATION CONDITIONS

1. Storage Basin Minimum BMPs.
 - (a) To maintain structural integrity, basins shall be inspected at least monthly, the berms of the storage basin(s) shall be mowed and kept free of any deep-rooted vegetation, animal dens, or other potential sources of damage, any leaks or issues shall be noted.
 - (b) The facility shall ensure that adequate provisions are provided to prevent surface water intrusion into the storage basin(s) and to divert stormwater runoff around the storage basin(s) and protect embankments from erosion.
 - (c) The minimum and maximum operating water levels for the storage basin(s) shall be clearly marked. Each storage basin shall be operated so that the maximum water elevation does not exceed upper operating level except due to exceedances of the 1-in-10 year or 25-year, 24-hour storm events. Storage basins shall be lowered to the minimum operating level prior to November 30 each year. Storage basins shall be inspected monthly for structural integrity and leaks.
 - (d) A least one gate, constructed of materials comparable to the fence, must be provided to access any storage basin and provide for maintenance and mowing. The gate shall remain locked except when opened by the permittee to perform maintenance or mowing.
 - (e) At least one sign shall appear on the fence on each side of each facility. Minimum wording shall be "SEWAGE TREATMENT FACILITY – KEEP OUT", in letters at least 2 inches high.
 - (f) It is a violation of this permit to place material in the emergency spillway or otherwise cause it to cease to function properly, as this may result in a catastrophic failure of the storage basin.
2. Land Application Equipment.
 - (a) Spray application equipment shall minimize the formation of aerosols.
 - (b) Land application equipment shall be visually inspected daily during land application to check for equipment malfunctions and leaks. The application system shall be operated so as to provide uniform distribution of wastes over the entire land application site. Land application equipment shall be calibrated at least once annually.
3. Land Application Fields.
 - (a) This special condition does not apply to fertilizer products that are exempted under the Missouri Clean Water Law and regulations, 10 CSR 20-6.015(3)(B)8.
 - (b) If land application sites listed in this permit are also included as land application sites in another permit, the wastewater and sludge applications from other sources shall be included in the application rates in the facility description. Records of the amount and application rate of wastewater or sludge from other sources must be kept.
 - (c) Public Access Restrictions. This permit does not authorize application of wastewater to public use areas.
 - (d) Grazing and harvesting deferment. Grazing of animals or harvesting of forage crops should be deferred for up to 30 days following wastewater irrigation depending upon ambient air temperature and sunlight conditions. The following deferments shall be considered:
 - (1) During the period from May 1 to October 31 of each year, the minimum deferment from grazing or forage harvesting shall be fourteen (14) days;
 - (2) During the period from November 1 to April 30 of each year, the minimum deferment from grazing or forage harvesting shall be thirty (30) days;
 - (3) Grazing of sewage irrigated land is generally not recommended for lactating dairy animals unless there has been a much longer deferment period; and
 - (4) Deferment may not be required for irrigation water that has been disinfected so that the water contains less than four hundred (400) fecal coliform organisms per one hundred milliliters (100 ml).
 - (e) No land application shall occur when the soil is frozen, snow covered, or saturated. There shall be no application during a precipitation event or if a precipitation event that is likely to create runoff is forecasted to occur within 24 hours of a planned application.
 - (f) Land application shall occur only during daylight hours.

D. LAND APPLICATION CONDITIONS (continued)

- (g) Land application fields shall be checked daily during land application for runoff. Sites that utilize spray irrigation shall monitor for the drifting of spray across property lines.
 - (h) Setback distances from sensitive features. There shall be no land application within:
 - (1) 300 feet of any well, sinkhole, losing stream, wetland, or cave entrance, water supply impoundment or stream intake;
 - (2) 150 feet of an occupied residence, public building, or public use area;
 - (3) 50 feet of gaining perennial or intermittent stream, public or privately owned pond or lake;
 - (4) 50 feet of property line or public road.
 - (i) Wastewater application on slopes exceeding 10%, the hourly application rate shall not exceed one-half (1/2) the design sustained permeability and in no case shall exceed one-half (1/2) inch per hour.
 - (j) Wastewater land applications shall not exceed agronomic rates to ensure agricultural use of nutrients and prevent contamination of surface and groundwater. The agronomic rate is the amount of wastewater applied to a field to meet the fertilizer recommendation.
4. Application Rate(s) and Loading.
- (a) The application rate shall not exceed any design hydraulic loading rate listed in the facility description.
 - (b) Wastewater application on slopes exceeding 10%:
 - (1) Initial application rate on dry soils may briefly exceed one-half (1/2) the design sustained permeability rate;
 - (2) The hourly application rate shall not exceed one-half (1/2) the design sustained permeability;
 - (c) Applications shall not exceed any agronomic rates listed in the facility description to ensure plant use of nutrients and prevent contamination of surface and groundwater. The agronomic rate is the amount of wastewater applied to a field to meet the fertilization needs of the plants.
 - (d) Runoff and ponding is prohibited.
5. Record Keeping
- (a) A daily land application log shall be prepared and kept on file at the permittee office location for each application site showing dates of application, weather condition (sunny, overcast, raining, below freezing etc...), soil moisture condition, application method.
 - (b) A record of monthly visual storage structure inspections shall be maintained.
 - (c) A record of land application equipment inspections and calibrations as well as land application field inspections shall be maintained.
 - (d) All records and monitoring results shall be maintained for at least five years and shall be made available to the department upon request.
 - (e) Annual summary for each field used for land application showing: number of days application occurred, crop grown and yield, and total amount of wastewater and/or sludge applied (gallons and/or tons per acre).
 - (f) Description of any unusual operating conditions encountered, narrative summary of any problems or deficiencies identified, corrective action taken, or improvements planned.

MISSOURI DEPARTMENT OF NATURAL RESOURCES
FACT SHEET
FOR THE PURPOSE OF NEW FACILITY
OF
MO-0139297
MID-STATES SPECIALTY EGGS, LLC

The Federal Water Pollution Control Act ("Clean Water Act" Section 402 Public Law 92-500 as amended) established the National Pollutant Discharge Elimination System (NPDES) permit program. This program regulates the discharge of pollutants from point sources into the waters of the United States, and the release of stormwater from certain point sources. All such discharges are unlawful without a permit (Section 301 of the "Clean Water Act"). After a permit is obtained, a discharge not in compliance with all permit terms and conditions is unlawful. Missouri State Operating Permits (MSOPs) are issued by the Director of the Missouri Department of Natural Resources (Department) under an approved program, operating in accordance with federal and state laws (Federal "Clean Water Act" and "Missouri Clean Water Law" Section 644 as amended). MSOPs are issued for a period of five (5) years unless otherwise specified for less.

As per [40 CFR Part 124.8(a)] and [10 CSR 20-6.020(1)(A)2.] a factsheet shall be prepared to give pertinent information regarding the applicable regulations, rationale for the development of effluent limitations and conditions, and the public participation process for the Missouri State Operating Permit (MSOP or operating permit) listed below. A factsheet is not an enforceable part of an operating permit.

PART I. FACILITY INFORMATION

Facility Type: Industrial – <1 MGD
SIC Code(s): 2054
NAICS Code(s): 1123
Application Date: 06/18/2019

FACILITY DESCRIPTION:

Egg washing facility. Design average flow of 20,000 gpd with a wet weather flow of 26,000 gpd. Construction of the holding basin was covered under CP0002082 with the statement of work complete being received January 29, 2020. The facility consists of the existing holding basin which will operate as the pretreatment cell, then the construction of a new holding basin to meet the minimum requirements for days of storage. From the storage basin, flows will be land applied via a tank sprayer pulled by farm equipment. Of the flows, 96% will be from the egg washing process (no animals) and 4% of the flow will be from the domestic wastewater generated onsite by the workers.

The charter number for the continuing authority for this facility is [LC001508372](#); this number was verified by the permit writer to be associated with the facility and precisely matches the continuing authority reported by the facility.

PERMITTED FEATURES TABLE:

| PERMITTED FEATURE | DESIGN FLOW (CFS) | TREATMENT LEVEL | EFFLUENT TYPE |
|-------------------|-------------------------|------------------|---------------|
| #001 | 0.0403 | Storage Basin(s) | Process |
| #002 | <i>Irrigation Field</i> | | |

FACILITY MAP:



PART II. RECEIVING WATERBODY INFORMATION

RECEIVING WATERBODY'S WATER QUALITY:

The receiving waterbody has no concurrent water quality data available.

303(D) LIST:

Section 303(d) of the federal Clean Water Act requires each state identify waters not meeting water quality standards and for which adequate water pollution controls have not been required. Water quality standards protect such beneficial uses of water as whole body contact (such as swimming), maintaining fish and other aquatic life, and providing drinking water for people, livestock, and wildlife. The 303(d) list helps state and federal agencies keep track of impaired waters not addressed by normal water pollution control programs. <http://dnr.mo.gov/env/wpp/waterquality/303d/303d.htm>

✓ Not applicable; this facility does not discharge to an impaired segment of a 303(d) listed stream.

TOTAL MAXIMUM DAILY LOAD (TMDL):

A TMDL is a calculation of the maximum amount of a given pollutant a water body can absorb before its water quality is affected; hence, the purpose of a TMDL is to determine the pollutant loading a specific waterbody can assimilate without exceeding water quality standards. If a water body is determined to be impaired as listed on the 303(d) list, then a watershed management plan or TMDL may be developed. The TMDL shall include the WLA calculation. <http://dnr.mo.gov/env/wpp/tmdl/>

✓ Not applicable; this facility does not discharge to a waterbody/watershed with a TMDL.

UPSTREAM OR DOWNSTREAM IMPAIRMENTS:

The permit writer has reviewed upstream and downstream stream segments of this facility for impairments.

✓ The permit writer has noted no upstream or downstream impairments near this facility.

APPLICABLE DESIGNATIONS OF WATERS OF THE STATE:

Per Missouri's Effluent Regulations [10 CSR 20-7.015(1)(B)], waters of the state are divided into seven categories. This facility is subject to effluent limitations derived on a site specific basis which are presented in each outfall's effluent limitation table and further discussed in Part IV: Effluents Limits Determinations

✓ All Other Waters

RECEIVING WATERBODY TABLE:

While this facility is no discharge, a receiving stream is listed for the purposes of showing what stream would be affected in the event of a discharge due to an acute or chronic rain event.

| OUTFALL | WATERBODY NAME | CLASS | WBID | DESIGNATED USES | DISTANCE TO SEGMENT | 12-DIGIT HUC |
|---------|--------------------------------|-------|------|---|---------------------|-------------------------------|
| #001 | Tributary to 8-20-13 MUDD V1.0 | n/a | n/a | GEN | 0.19 mi | 10300103-0407 Shaver Creek |
| #001 | 8-20-13 MUDD V1.0 | C | 3960 | GEN, HHP, IRR, LWW, SCR, WBC-B, WWH (ALP) | | |
| #002 | Tributary to Olive Branch | n/a | n/a | GEN | 1.0 mi | |
| #002 | Olive Branch | C | 3504 | GEN, HHP, IRR, LWW, SCR, WBC-B, WWH (ALP) | | |

n/a not applicable

Classes are hydrologic classes as defined in 10 CSR 20-7.031(1)(F). L1: Lakes with drinking water supply - wastewater discharges are not permitted to occur to L1 watersheds per 10 CSR 20-7.015(3)(C); L2: major reservoirs; L3: all other public and private lakes; P: permanent streams; C: streams which may cease flow in dry periods but maintain pools supporting aquatic life; E: streams which do not maintain surface flow; and W: wetland. Losing streams are defined in 10 CSR 20-7.031(1)(O) and are designated on the Losing Stream dataset or determined by the Department to lose 30% or more of flow to the subsurface.

WBID = Waterbody Identification: Missouri Use Designation Dataset per 10 CSR 20-7.031(1)(Q) and (S) as 8-20-13 MUDD V1.0 or newer; data can be found as an ArcGIS shapefile on MSDIS at ftp://msdis.missouri.edu/pub/Inland_Water_Resources/MO_2014_WQS_Stream_Classifications_and_Use_shp.zip; New C streams described on the dataset per 10 CSR 20-7.031(2)(A)3. as 100K Extent Remaining Streams.

Per 10 CSR 20-7.031, the Department defines the Clean Water Commission's water quality objectives in terms of "water uses to be maintained and the criteria to protect those uses." The receiving stream and 1st classified receiving stream's beneficial water uses are to be maintained in the receiving streams in accordance with [10 CSR 20-7.031(1)(C)]. Uses which may be found in the receiving streams table, above:

10 CSR 20-7.031(1)(C)1.: **ALP** = Aquatic Life Protection (formerly AQL; current uses are defined to ensure the protection and propagation of fish shellfish and wildlife, further subcategorized as: WWH = Warm Water Habitat; CLH = Cool Water Habitat; CDH = Cold Water Habitat; EAH = Ephemeral Aquatic Habitat; MAH = Modified Aquatic Habitat; LAH = Limited Aquatic Habitat. This permit uses ALP effluent limitations in 10 CSR 20-7.031 Table A1-A2 for all habitat designations unless otherwise specified.

10 CSR 20-7.031(1)(C)2.: Recreation in and on the water

WBC = Whole Body Contact recreation where the entire body is capable of being submerged;

WBC-A = whole body contact recreation supporting swimming uses and has public access;

WBC-B = whole body contact recreation not supported in WBC-A;

SCR = Secondary Contact Recreation (like fishing, wading, and boating)

10 CSR 20-7.031(1)(C)3. to 7.:

HHP (formerly HHF) = Human Health Protection as it relates to the consumption of fish and drinking of water;

IRR = irrigation for use on crops utilized for human or livestock consumption

LWW = Livestock and Wildlife Watering (current narrative use is defined as LWP = Livestock and Wildlife Protection);

DWS = Drinking Water Supply

IND = industrial water supply

10 CSR 20-7.031(1)(C)8-11.: Wetlands (10 CSR 20-7.031 Tables A1-B3 currently does not have corresponding habitat use criteria for these defined uses): WSA = storm- and flood-water storage and attenuation; WHP = habitat for resident and migratory wildlife species; WRC = recreational, cultural, educational, scientific, and natural aesthetic values and uses; WHC = hydrologic cycle maintenance.

10 CSR 20-7.031(6): **GRW** = Groundwater

RECEIVING WATERBODY MONITORING REQUIREMENTS:

No receiving water monitoring requirements are recommended at this time.

PART III. RATIONALE AND DERIVATION OF PERMIT CONDITIONS

ALTERNATIVE EVALUATIONS FOR NEW FACILITIES:

As per [10 CSR 20-7.015(4)(A)], discharges to losing streams shall be permitted only after other alternatives including land application, discharges to a gaining stream and connection to a regional wastewater treatment facility have been evaluated and determined to be unacceptable for environmental and/or economic reasons.

✓ Not applicable; the facility does not discharge to a losing stream as defined by [10 CSR 20-2.010(36)] & [10 CSR 20-7.031(1)(N)], or is an existing facility.

ANTIBACKSLIDING:

Federal Regulations [CWA §303(d)(4); CWA §402(c); 40 CFR Part 122.44(l)] require a reissued permit to be as stringent as the previous permit with some exceptions. Backsliding (a less stringent permit limitation) is only allowed under certain conditions.

✓ New facility, backsliding does not apply.

ANTIDEGRADATION REVIEW:

Process water discharges with new, altered, or expanding flows, the Department is to document, by means of antidegradation review, if the use of a water body's available assimilative capacity is justified. In accordance with Missouri's water quality regulations for antidegradation [10 CSR 20-7.031(3)], degradation may be justified by documenting the socio-economic importance of a discharge after determining the necessity of the discharge. Facilities must submit the antidegradation review request to the Department prior to establishing, altering, or expanding discharges. See <http://dnr.mo.gov/env/wpp/permits/antideg-implementation.htm>

✓ Not applicable; the facility has not submitted information proposing expanded or altered process water discharge; no further degradation proposed therefore no further review necessary.

This permit requires the development and implementation of a Stormwater Pollution Prevention Plan (SWPPP) which must include an alternative analysis (AA) of the BMPs. The SWPPP must be developed, implemented, updated, and maintained at the facility. Failure to implement and maintain the chosen alternative, is a permit violation. The AA is a structured evaluation of BMPs to determine which are reasonable and cost effective. Analysis should include practices designed to be 1) non-degrading, 2) less degrading, or 3) degrading water quality. The chosen BMP will be the most reasonable and cost effective while ensuring the highest statutory and regulatory requirements are achieved and the highest quality water attainable for the facility is discharged. The analysis must demonstrate why "no discharge" or "no exposure" are not feasible alternatives at the facility. Existing facilities with established SWPPPs and BMPs need not conduct an additional alternatives analysis unless new BMPs are established to address BMP failures or benchmark exceedances. This structured analysis of BMPs serves as the antidegradation review, fulfilling the requirements of 10 CSR 20-7.015(9)(A)5 and 7.031(3). For stormwater discharges with new, altered, or expanding discharges, the stormwater BMP chosen for the facility, through the AA performed by the facility, must be implemented and maintained at the facility. Failure to implement and maintain the chosen BMP alternative is a permit violation; see SWPPP.

✓ Applicable; the facility must review and maintain stormwater BMPs as appropriate.

BEST MANAGEMENT PRACTICES:

Minimum site-wide best management practices are established in this permit to assure all permittees are managing their sites equally to protect waters of the state from certain activities which could cause negative effects in receiving water bodies. While not all sites require a SWPPP because the SIC codes are specifically exempted in 40 CFR 122.26(b)(14), these best management practices are not specifically included for stormwater purposes. These practices are minimum requirements for all industrial sites to protect waters of the state. If the minimum best management practices are not followed, the facility may violate general criteria [10 CSR 20-7.031(4)]. Statutes are applicable to all permitted facilities in the state, therefore pollutants cannot be released unless in accordance with RSMo 644.011 and 644.016 (17).

CHANGES IN DISCHARGES OF TOXIC POLLUTANT:

This special condition reiterates the federal rules found in 40 CFR 122.44(f) and 122.42(a)(1). In these rules, the facility is required to report changes in amounts of toxic substances discharged. Toxic substances are defined in 40 CFR 122.2 as "...any pollutant listed as toxic under section 307(a)(1) or, in the case of "sludge use or disposal practices," any pollutant identified in regulations implementing section 405(d) of the CWA." Section 307 of the clean water act then refers to those parameters found in 40 CFR 401.15. The permittee should also consider any other toxic pollutant in the discharge as reportable under this condition.

COMPLIANCE AND ENFORCEMENT:

Enforcement is the action taken by the Water Protection Program (WPP) to bring an entity into compliance with the Missouri Clean Water Law, its implementing regulations, and/or any terms and conditions of an operating permit. The primary purpose of the enforcement activity in the WPP is to resolve violations and return the entity to compliance.

✓ Applicable; the permittee/facility is currently under enforcement action due to discharging without an operating permit.

DOMESTIC WASTEWATER, SLUDGE, AND BIOSOLIDS:

Domestic wastewater is defined as wastewater (i.e., human sewage) originating primarily from the sanitary conveyances of bathrooms and kitchens. Domestic wastewater excludes stormwater, animal waste, process waste, and other similar waste.

✓ Applicable; this facility uses a lagoon system which the Department of Natural Resources must authorize in accordance with 19 CSR 20-3.060(6)(D).

Sewage sludge is solid, semi-solid, or liquid residue generated during the treatment of domestic sewage in a treatment works; including but not limited to, domestic septage; scum or solids removed in primary, secondary, or advanced wastewater treatment process; and material derived from sewage sludge. Sewage sludge does not include ash generated during the firing of sewage sludge in a sewage sludge incinerator or grit and screening generated during preliminary treatment of domestic sewage in a treatment works. Biosolids are solid materials resulting from domestic wastewater treatment meeting federal and state criteria for productive use (i.e. fertilizer) and after having pathogens removed.

Additional information: <http://extension.missouri.edu/main/DisplayCategory.aspx?C=74> (WQ422 through WQ449).

- ✓ Applicable, sludge is stored in the lagoon. The permitted management strategy must be followed, see FACILITY DESCRIPTION in the permit. If the described management strategy cannot be followed, the permittee must obtain a permit modification. See Standard Conditions Part III.

EFFLUENT LIMITATION GUIDELINE:

Effluent Limitation Guidelines, or ELGs, are found at 40 CFR 400-499. These are limitations established by the EPA based on the SIC code and the type of work a facility is conducting. Most ELGs are for process wastewater and some address stormwater. All are technology based limitations which must be met by the applicable facility at all times.

- ✓ The facility does not have an associated ELG.

ELECTRONIC DISCHARGE MONITORING REPORT (EDMR) SUBMISSION SYSTEM:

The U.S. Environmental Protection Agency (EPA) promulgated a final rule on October 22, 2015, to modernize Clean Water Act reporting for municipalities, industries, and other facilities by converting to an electronic data reporting system. The final rule requires regulated entities and state and federal regulators to use information technology to electronically report data required by the National Pollutant Discharge Elimination System (NPDES) permit program instead of filing paper reports. To comply with the federal rule, the Department is requiring all permittees to begin submitting discharge monitoring data and reports online.

Per 40 CFR 127.15 and 127.24, permitted facilities may request a temporary waiver for up to 5 years or a permanent waiver from electronic reporting from the Department. To obtain an electronic reporting waiver, a permittee must first submit an eDMR Waiver Request Form: <http://dnr.mo.gov/forms/780-2692-f.pdf>. A request must be made for each facility. If more than one facility is owned or operated by a single entity, then the entity must submit a separate request for each facility based on its specific circumstances. An approved waiver is not transferable.

The Department must review and notify the facility within 120 calendar days of receipt if the waiver request has been approved or rejected [40 CFR 124.27(a)]. During the Department review period as well as after a waiver is granted, the facility must continue submitting a hard-copy of any reports required by their permit. The Department will enter data submitted in hard-copy from those facilities allowed to do so and electronically submit the data to the EPA on behalf of the facility.

To assist the facility in entering data into the eDMR system, the permit describes limit sets in each table in Part A of the permit. The data entry personnel should use these identifiers to assure data entry is being completed appropriately.

- ✓ The permittee/facility is not currently using the eDMR data reporting system. The permittee shall submit an eDMR Permit Holder and Certifier Registration form within **30 days** of the effective date of this permit.

GENERAL CRITERIA CONSIDERATIONS:

In accordance with 40 CFR 122.44(d)(1), effluent limitations shall be placed into permits for pollutants determined to cause, have reasonable potential to cause, or to contribute to, an excursion above any water quality standard, including narrative water quality criteria. In order to comply with this regulation, the permit writer has completed a reasonable potential determination on whether discharges have reasonable potential to cause, or contribute to an excursion of the general criteria listed in 10 CSR 20-7.031(4). In instances where reasonable potential exists, the permit includes limitations within the permit to address the reasonable potential. In discharges where reasonable potential does not exist, the permit may include monitoring to later determine the discharge's potential to impact the narrative criteria. Additionally, §644.076.1, RSMo as well as Section D – Administrative Requirements of Standard Conditions Part I of this permit state it shall be unlawful for any person to cause or allow any discharge of water contaminants from any water contaminant or point source located in Missouri in violation of sections 644.006 to 644.141 of the Missouri Clean Water Law or any standard, rule, or regulation promulgated by the commission.

- ✓ Not applicable; this permit does not contain effluent limitations based on the narrative criteria.

GROUNDWATER MONITORING:

Groundwater is a water of the state according to 10 CSR 20-2.010(82), and is subject to regulations at 10 CSR 20-7.015(7) and 10 CSR 20-7.031(6) and must be protected accordingly.

- ✓ This facility is not required to monitor groundwater for the water protection program.

NO-DISCHARGE LAND APPLICATION:

Land application of wastewater or sludge shall comply with the all applicable no-discharge requirements listed in 10 CSR 20-6.015 and all facility operations and maintenance requirements listed in 10 CSR 20-8.020(15). These requirements ensure appropriate operation of the no-discharge land application systems and prevent unauthorized and illicit discharges to waters of the state. Land applications by a contract hauler on fields that the permittee has a spreading agreement on are not required to be in this permit. A spreading agreement does not constitute the field being rented or leased by the permittee as they do not have any control over management of the field.

- ✓ Applicable; This permit authorizes operation of a no-discharge land application system to treat wastewater or sludge.

LAND APPLICATION RATES:

In accordance with 10 CSR 20-8.020(15), wastewater and sludge must be land applied at either hydraulic loading rates, nitrogen loading rates, or trace elements loading rates.

Conversion Factors for laboratory testing results: [mg/L or mg/kg or ppm] x [conversion factor] = [pounds per Unit Volume]

| <u>Unit Volume</u> | <u>Conversion Factors</u> |
|----------------------|---------------------------|
| lbs./acre inch | 0.226 |
| lbs./1,000 gallons | 0.0083 |
| lbs./100 cubic feet | 0.0062 |
| lbs/ton (wet weight) | 0.002 |

- ✓ Applicable; **Hydraulic Loading Rates** – wastewater shall be land applied at rates to allow for proper soil absorption and plant uptake. In no case, shall the hydraulic loading rate exceed the soil permeability rate, resulting in a discharge. Hydraulic loading rates must also consider nitrogen loading to the soils and crop. In accordance with 10 CSR 20-8.020(15)(F)7., wastewater application rates should not exceed a nitrogen application rate of 150 pounds total nitrogen per acre per year, and the applied wastewater should not exceed ten (10) mg/l of nitrate nitrogen as N.

NUMERIC LAKE NUTRIENT CRITERIA

- ✓ This facility is not located within a lake watershed where numeric lake nutrient criteria are applicable, per 10 CSR 20-7.031(5)(N).

OIL/WATER SEPARATORS:

Oil water separator (OWS) tank systems are frequently found at industrial sites where process water and stormwater may contain oils and greases, oily wastewaters, or other immiscible liquids requiring separation. Food industry discharges typically require pretreatment prior to discharge to municipally owned treatment works. Per 10 CSR 26-2.010(2)(B), all oil water separator tanks must be operated according to manufacturer's specifications and authorized in NPDES permits or may be regulated as a petroleum tank.

- ✓ Not applicable; the permittee has not disclosed the use of any oil water separators at this permitted facility and therefore oil water separator tanks are not authorized by this permit.

REASONABLE POTENTIAL (RP):

Federal regulation [40 CFR Part 122.44(d)(1)(i)] requires effluent limitations for all pollutants which are (or may be) discharged at a level causing or have the reasonable potential to cause (or contribute to) an in-stream excursion above narrative or numeric water quality standards. Per 10 CSR 20-7.031(4), general criteria shall be applicable to all waters of the state at all times; however, acute toxicity criteria may be exceeded by permit in zones of initial dilution, and chronic toxicity criteria may be exceeded by permit in mixing zones. If the permit writer determines any given pollutant has the reasonable potential to cause or contribute to an in-stream excursion above the WQS, the permit must contain effluent limits for the pollutant per 40 CFR Part 122.44(d)(1)(iii) and the most stringent limits per 10 CSR 20-7.031(9)(A). Permit writers may use mathematical reasonable potential analysis (RPA) using the Technical Support Document for Water Quality Based Toxics Control (TSD) methods (EPA/505/2-90-001) as found in Section 3.3.2, or may also use reasonable potential determinations (RPD) as provided in Sections 3.1.2, 3.1.3, and 3.2 of the TSD.

- ✓ Not applicable; a mathematical RPA was not conducted for this facility, as it is a land application new facility.

SAMPLING FREQUENCY JUSTIFICATION:

This facility is a new facility quarterly sampling is required to determine if the facility will be in compliance with the operating permit. 40 CFR 122.45(d)(1) indicates all continuous discharges shall be permitted with daily maximum and monthly average limits. Minimum sampling frequency for all parameters is annually per 40 CFR 122.44(i)(2).

SAMPLING TYPE JUSTIFICATION:

Due to the discharge being from irrigation from a storage basin, a grab sample is a representative and appropriate sample type. Variation in nutrient concentration is not expected over a 24 hour period.

DISCHARGE PARAMETERS – BOD₅, TSS, Ammonia, pH, Oil & Grease, *E. coli*, Total Phosphorus, and Total Kjeldahl Nitrogen, and nitrite + nitrate are conventional pollutants found in domestic wastewater. These parameters shall be monitored at least once during the discharge event. Additional monitoring may be required by the Department on a case-by-case basis. All samples shall be collected as grab samples. pH samples cannot be preserved and must be sampled in the field.

SCHEDULE OF COMPLIANCE (SOC):

A schedule of remedial measures included in a permit, including an enforceable sequence of interim requirements (actions, effluent limits, operations, or milestone events) leading to compliance with the Missouri Clean Water Law, its implementing regulations, and/or the terms and conditions of an operating permit. SOC's are allowed under 40 CFR 122.47 providing certain conditions are met. A SOC is not allowed:

- For effluent limitations based on technology-based standards established in accordance with federal requirements, if the deadline for compliance established in federal regulations has passed. 40 CFR § 125.3.
- For a newly constructed facility in most cases. Newly constructed facilities must meet applicable effluent limitations when discharge begins, because the facility has installed the appropriate control technology as specified in a permit or antidegradation review. A SOC is allowed for a new water quality based effluent limit not included in a previously public noticed permit or antidegradation review, which may occur if a regulation changes during construction.
- To develop a TMDL, UAA, or other study associated with development of a site specific criterion. A facility is not prohibited from conducting these activities, but a SOC may not be granted for conducting these activities.

In order to provide guidance in developing SOC's, and to attain a greater level of consistency, the Department issued a policy on development of SOC's on October 25, 2012. The policy provides guidance to permit writers on standard time frames for schedules for common activities, and guidance on factors to modify the length of the schedule.

✓ Not applicable; this permit does not contain a SOC.

SPILL REPORTING:

Per 260.505 RSMo, any emergency involving a hazardous substance must be reported to the Department's 24 hour Environmental Emergency Response hotline at (573) 634-2436 at the earliest practicable moment after discovery. The Department may require the submittal of a written report detailing measures taken to clean up a spill. These reporting requirements apply whether or not the spill results in chemicals or materials leaving the permitted property or reaching waters of the state. This requirement is in addition to the noncompliance reporting requirement found in Standard Conditions Part I. <http://dnr.mo.gov/env/esp/spillbill.htm>

SLUDGE – INDUSTRIAL:

Industrial sludge is solid, semi-solid, or liquid residue generated during the treatment of industrial process wastewater in a treatment works; including but not limited to, scum or solids removed in primary, secondary, or advanced wastewater treatment process; scum and solids filtered from water supplies and backwashed; and a material derived from industrial sludge.

- ✓ Applicable; this permit does not authorize land application of industrial sludge. Sludges are stored in the lagoon. The permitted management strategy must be followed, see permit. If the permitted management strategy cannot be followed, the permittee must obtain a permit modification.

STANDARD CONDITIONS:

The standard conditions Part I attached to this permit incorporate all sections of 40 CFR 122.41(a) through (n) by reference as required by law. These conditions, in addition to the conditions enumerated within the standard conditions should be reviewed by the permittee to ascertain compliance with this permit, state regulations, state statutes, federal regulations, and the Clean Water Act. Standard Conditions Part III, if attached to this permit, incorporate all requirements dealing with domestic sludges.

STORMWATER PERMITTING: LIMITATIONS AND BENCHMARKS:

Because of the fleeting nature of stormwater discharges, the Department, under the direction of EPA guidance, has determined monthly averages are capricious measures of stormwater discharges. The *Technical Support Document for Water Quality Based Toxics Control* (EPA/505/2-90-001; 1991) Section 3.1 indicates most procedures within the document apply only to water quality based approaches, not end-of-pipe technology-based controls. Hence, stormwater-only outfalls will generally only contain a maximum daily limit (MDL), benchmark, or monitoring requirement as dictated by site specific conditions, the BMPs in place, past performance of the facility, and the receiving water's current quality.

Sufficient rainfall to cause a discharge for one hour or more from a facility would not necessarily cause significant flow in a receiving stream. Acute Water Quality Standards (WQSs) are based on one hour of exposure, and must be protected at all times. Therefore, industrial stormwater facilities with toxic contaminants present in the stormwater may have the potential to cause a violation of acute WQSs if toxic contaminants occur in sufficient amounts. In this instance, the permit writer may apply daily maximum limitations.

Conversely, it is unlikely for rainfall to cause a discharge for four continuous days from a facility; if this does occur however, the receiving stream will also likely sustain a significant amount of flow providing dilution. Most chronic WQSs are based on a four-day exposure with some exceptions. Under this scenario, most industrial stormwater facilities have limited potential to cause a violation of chronic water quality standards in the receiving stream.

A standard mass-balance equation cannot be calculated for stormwater because stormwater flow and flow in the receiving stream cannot be determined for conditions on any given day or storm event. The amount of stormwater discharged from the facility will vary based on current and previous rainfall, soil saturation, humidity, detention time, BMPs, surface permeability, etc. Flow in the receiving stream will vary based on climatic conditions, size of watershed, area of surfaces with reduced permeability (houses, parking lots, and the like) in the watershed, hydrogeology, topography, etc. Decreased permeability may increase the stream flow dramatically over a short period of time (flash).

Numeric benchmark values are based on site specific requirements taking in to account a number of factors but cannot be applied to any process water discharges. First, the technology in place at the site to control pollutant discharges in stormwater is evaluated. The permit writer also evaluates other similar permits for similar activities. A review of the guidance forming the basis of Environmental Protection Agency's (EPA's) *Multi-Sector General Permit for Stormwater Discharges Associated with Industrial Activity* (MSGP) may also occur. Because precipitation events are sudden and momentary, benchmarks based on state or federal standards or recommendations use the Criteria Maximum Concentration (CMC) value, or acute standard may also be used. The CMC is the estimate of the highest concentration of a material in surface water to which an aquatic community can be exposed briefly without resulting in an unacceptable effect. The CMC for aquatic life is intended to be protective of the vast majority of the aquatic communities in the United States. If a facility has not disclosed BMPs applicable to the pollutants for the site, the permittee may not be eligible for benchmarks.

40 CFR 122.44(b)(1) requires the permit implement the most stringent limitations for each discharge, including industrially exposed stormwater; and 40 CFR 122.44(d)(1)(i) and (iii) requires the permit to include water-quality based effluent limitations where reasonable potential has been found. However, because of the non-continuous nature of stormwater discharges, staff are unable to perform statistical Reasonable Potential Analysis (RPA) under most stormwater discharge scenarios. Reasonable potential determinations (RPDs; see REASONABLE POTENTIAL above) using best professional judgment are performed.

Benchmarks require the facility to monitor, and if necessary, replace and update stormwater control measures. Benchmark concentrations are not effluent limitations. A benchmark exceedance, therefore, is not a permit violation; however, failure to take corrective action is a violation of the permit. Benchmark monitoring data is used to determine the overall effectiveness of control measures and to assist the permittee in knowing when additional corrective actions may be necessary to comply with the conditions of the permit.

BMP inspections typically occur more frequently than sampling. Sampling frequencies are based on the facility's ability to comply with the benchmarks and the requirements of the permit. Inspections should occur after large rain events and any other time an issue is noted; sampling after a benchmark exceedance may need to occur to show the corrective action taken was meaningful. When a permitted feature or outfall consists of only stormwater, a benchmark may be implemented at the discretion of the permit writer, if there is no RP for water quality excursions.

✓ Not applicable; the permit writer has not established any benchmarks for this facility.

STORMWATER POLLUTION PREVENTION PLAN (SWPPP):

In accordance with 40 CFR 122.44(k), Best Management Practices (BMPs) must be used to control or abate the discharge of pollutants when: 1) Authorized under section 304(e) of the Clean Water Act (CWA) for the control of toxic pollutants and hazardous substances from ancillary industrial activities; 2) Authorized under section 402(p) of the CWA for the control of stormwater discharges; 3) Numeric effluent limitations are infeasible; or 4) the practices are reasonably necessary to achieve effluent limitations and standards or to carry out the purposes and intent of the CWA. In accordance with the EPA's *Developing Your Stormwater Pollution Prevention Plan, A Guide for Industrial Operators*, (EPA 833-B-09-002) published by the EPA in 2015 https://www.epa.gov/sites/production/files/2015-11/documents/swppp_guide_industrial_2015.pdf, BMPs are measures or practices used to reduce the amount of pollution entering waters of the state from a permitted facility. BMPs may take the form of a process, activity, or physical structure. Additionally in accordance with the Stormwater Management, a SWPPP is a series of steps and activities to 1) identify sources of pollution or contamination, and 2) select and carry out actions which prevent or control the pollution of storm water discharges. Additional information can be found in *Stormwater Management for Industrial Activities: Developing Pollution Prevention Plans and Best Management Practices* (EPA 832-R-92-006; September 1992).

A SWPPP must be prepared by the permittee if the SIC code is found in 40 CFR 122.26(b)(14) and/or 10 CSR 20-6.200(2). A SWPPP may be required of other facilities where stormwater has been identified as necessitating better management. The purpose of a SWPPP is to comply with all applicable stormwater regulations by creating an adaptive management plan to control and mitigate stream pollution from stormwater runoff. Developing a SWPPP provides opportunities to employ appropriate BMPs to minimize the risk of pollutants being discharged during storm events. The following paragraph outlines the general steps the permittee should take to determine which BMPs will work to achieve the benchmark values or limits in the permit. This section is not intended to be all encompassing or restrict the use of any physical BMP or operational and maintenance procedure assisting in pollution control. Additional steps or revisions to the SWPPP may be required to meet the requirements of the permit.

Areas which should be included in the SWPPP are identified in 40 CFR 122.26(b)(14). Once the potential sources of stormwater pollution have been identified, a plan should be formulated to best control the amount of pollutant being released and discharged by each activity or source. This should include, but is not limited to, minimizing exposure to stormwater, good housekeeping measures, proper facility and equipment maintenance, spill prevention and response, vehicle traffic control, and proper materials handling. Once a plan has been developed the facility will employ the control measures determined to be adequate to achieve the benchmark values discussed above. The facility will conduct monitoring and inspections of the BMPs to ensure they are working properly and re-evaluate any BMP not achieving compliance with permitting requirements. For example, if sample results from an outfall show values of TSS above the benchmark value, the BMP being employed is deficient in controlling stormwater pollution. Corrective action should be taken to repair, improve, or replace the failing BMP. This internal evaluation is required at least once per month but should be continued more frequently if BMPs continue to fail. If failures do occur, continue this trial and error process until appropriate BMPs have been established.

For new, altered, or expanded stormwater discharges, the SWPPP shall identify reasonable and effective BMPs while accounting for environmental impacts of varying control methods. The antidegradation analysis must document why no discharge or no exposure options are not feasible. The selection and documentation of appropriate control measures shall serve as an alternative analysis of technology and fulfill the requirements of antidegradation [10 CSR 20-7.031(3)]. For further guidance, consult the antidegradation implementation procedure (<http://dnr.mo.gov/env/wpp/docs/AIP050212.pdf>).

Alternative Analysis (AA) evaluation of the BMPs is a structured evaluation of BMPs which are reasonable and cost effective. The AA evaluation should include practices designed to be: 1) non-degrading; 2) less degrading; or 3) degrading water quality. The glossary of AIP defines these three terms. The chosen BMP will be the most reasonable and effective management strategy while ensuring the highest statutory and regulatory requirements are achieved and the highest quality water attainable for the facility is discharged. The AA evaluation must demonstrate why “no discharge” or “no exposure” is not a feasible alternative at the facility. This structured analysis of BMPs serves as the antidegradation review, fulfilling the requirements of 10 CSR 20-7.031(3) Water Quality Standards and *Antidegradation Implementation Procedure* (AIP), Section II.B.

If parameter-specific numeric benchmark exceedances continue to occur and the permittee feels there are no practicable or cost-effective BMPs which will sufficiently reduce a pollutant concentration in the discharge to the benchmark values established in the permit, the permittee can submit a request to re-evaluate the benchmark values. This request needs to include 1) a detailed explanation of why the facility is unable to comply with the permit conditions and unable to establish BMPs to achieve the benchmark values; 2) financial data of the company and documentation of cost associated with BMPs for review and 3) the SWPPP, which should contain adequate documentation of BMPs employed, failed BMPs, corrective actions, and all other required information. This will allow the Department to conduct a cost analysis on control measures and actions taken by the facility to determine cost-effectiveness of BMPs. The request shall be submitted in the form of an operating permit modification, which includes an appropriate fee; the application is found at: <https://dnr.mo.gov/forms/#WaterPollution>

✓ Applicable; a SWPPP shall be developed and implemented for this facility.

SUFFICIENTLY SENSITIVE ANALYTICAL METHODS:

Please review Standard Conditions Part 1, section A, number 4. The analytical and sampling methods used shall conform to the reference methods listed in 10 CSR 20-7.015 and/or 40 CFR 136 unless alternates are approved by the Department. The facility shall use sufficiently sensitive analytical methods for detecting, identifying, and measuring the concentrations of pollutants. The facility shall ensure the selected methods are able to quantify the presence of pollutants in a given discharge at concentrations low enough to determine compliance with Water Quality Standards in 10 CSR 20-7.031 or effluent limitations unless provisions in the permit allow for other alternatives. A method is “sufficiently sensitive” when; 1) the method quantifies the pollutant below the level of the applicable water quality criterion or; 2) the method minimum level is above the applicable water quality criterion, but the amount of pollutant in a facility’s discharge is high enough the method detects and quantifies the level of pollutant in the discharge, or 3) the method has the lowest minimum level of the analytical methods approved under 10 CSR 20-7.015 and or 40 CFR 136. These methods are also required for parameters listed as monitoring only, as the data collected may be used to determine if numeric limitations need to be established. A permittee is responsible for working with their contractors to ensure the analysis performed is sufficiently sensitive. 40 CFR 136 lists the approved methods accepted by the Department. Tables A1-B3 at 10 CSR 20-7.031 shows water quality standards.

UNDERGROUND INJECTION CONTROL (UIC):

The UIC program for all classes of wells in the State of Missouri is administered by the Missouri Department of Natural Resources and approved by EPA pursuant to section 1422 and 1425 of the Safe Drinking Water Act (SDWA) and 40 CFR 147 Subpart AA. Injection wells are classified based on the liquids which are being injected. Class I wells are hazardous waste wells which are banned by RSMo 577.155; Class II wells are established for oil and natural gas production; Class III wells are used to inject fluids to extract minerals; Class IV wells are also banned by Missouri in RSMo 577.155; Class V wells are shallow injection wells; some examples are heat pump wells and groundwater remediation wells. Domestic wastewater being disposed of sub-surface is also considered a Class V well. In accordance with 40 CFR 144.82, construction, operation, maintenance, conversion, plugging, or closure of injection wells shall not cause movement of fluids containing any contaminant into Underground Sources of Drinking Water (USDW) if the presence of any contaminant may cause a violation of drinking water standards or groundwater standards under 10 CSR 20-7.031, or other health based standards, or may otherwise adversely affect human health. If the director finds the injection activity may endanger USDWs, the Department may require closure of the injection wells, or other actions listed in 40 CFR 144.12(c), (d), or (e). In accordance with 40 CFR 144.26, the permittee shall submit a Class V Well Inventory Form for each active or new underground injection well drilled, or when the status of a well changes, to the Missouri Department of Natural Resources, Geological Survey Program, P.O. Box 250, Rolla, Missouri 65402. The Class V Well Inventory Form can be requested from the Geological Survey Program or can be found at the following web address: <http://dnr.mo.gov/forms/780-1774-f.pdf>

- ✓ Not applicable; the permittee has not submitted materials indicating the facility will be performing UI at this site.

VARIANCE:

Per the Missouri Clean Water Law §644.061.4, variances shall be granted for such period of time and under such terms and conditions as shall be specified by the commission in its order. The variance may be extended by affirmative action of the commission. In no event shall the variance be granted for a period of time greater than is reasonably necessary for complying with the Missouri Clean Water Law §§644.006 to 644.141 or any standard, rule or regulation promulgated pursuant to Missouri Clean Water Law §§644.006 to 644.141.

- ✓ Not applicable; this permit is not drafted under premise of a petition for variance.

WASTELOAD ALLOCATIONS (WLA) FOR LIMITS:

As per [10 CSR 20-2.010(78)], the WLA is the amount of pollutant each discharger is allowed to discharge into the receiving stream without endangering water quality. Two general types of effluent limitations, technology-based effluent limits (TBELs) and water quality based effluent limits (WQBELs) are reviewed. If one limit does not provide adequate protection for the receiving water, then the other must be used per 10 CSR 20-7.015(9)(A).

- ✓ Not applicable; wasteload allocations were not calculated.

WASTELOAD ALLOCATION (WLA) MODELING:

Permittees may submit site specific studies to better determine the site specific wasteload allocations applied in permits.

- ✓ Not applicable; a WLA study was either not submitted or determined not applicable by Department staff.

WATER QUALITY STANDARD REVISION:

In accordance with section 644.058, RSMo, the Department is required to utilize an evaluation of the environmental and economic impacts of modifications to water quality standards of twenty-five percent or more when making individual site-specific permit decisions.

- ✓ This operating permit does not contain requirements for a permit limit based on a water quality standard which has changed twenty-five percent or more since the previous operating permit.

PART IV. PERMIT LIMITS & MONITORING DETERMINATION

Effluent limitations derived and established for this permit are based on current operations of the facility. Effluent means both process water and stormwater. Any flow through the outfall is considered a discharge and must be sampled and reported as provided below. Future permit action due to facility modification may contain new operating permit terms and conditions that supersede the terms and conditions, including effluent limitations, of this operating permit.

PERMITTED FEATURE #001 – No discharge Storage Basins/Lagoons

Limitations derived and established in the below Storage Basin Limitations Table are based on current operations of the facility. Future permit action due to facility modification may contain new operating permit terms and conditions that supersede the terms and conditions, including effluent limitations, of this operating permit.

STORAGE BASIN LIMITATIONS TABLE:

| PARAMETERS | UNIT | DAILY MAX | PREVIOUS PERMIT LIMITS | MINIMUM SAMPLING FREQUENCY | MINIMUM REPORTING FREQUENCY | SAMPLE TYPE |
|--------------------------|--------|-----------|------------------------|----------------------------|-----------------------------|-------------|
| STORAGE BASIN | | | | | | |
| FREEBOARD | Feet | * | new | once/month | once/year | measured |
| PRECIPITATION | Inches | * | new | once/month | once/year | measured |
| WASTEWATER | | | | | | |
| NITRATE NITROGEN AS N | mg/L | * | new | once/year | once/year | grab |
| AMMONIA NITROGEN AS N | mg/L | * | new | once/year | once/year | grab |
| NITROGEN, TOTAL KJELDAHL | mg/L | * | new | once/year | once/year | grab |
| TOTAL PHOSPHORUS AS P | mg/L | * | new | once/year | once/year | grab |
| pH | SU | * | new | once/year | once/year | grab |
| OIL AND GREASE | mg/L | * | new | once/year | once/year | grab |
| TOTAL SUSPENDED SOLIDS | mg/L | * | new | once/year | once/year | grab |

* - Monitoring requirement only

NEW - Parameter not previously established in previous state operating permit.

PERMITTED FEATURE #001 – MONITORING REQUIREMENTS:

STORAGE BASIN:

Freeboard

Monitoring requirement to verify adequate freeboard is maintained, so as to avoid an overflow of the storage basin.

Precipitation

Monitoring requirement to verify adequate freeboard is maintained, so as to avoid an overflow of the storage basin. Additionally, precipitation monitoring allows the permittee to operate the land application activity to prevent over application during saturated conditions that may result in a discharge.

WASTEWATER:

Nitrate Nitrogen as N

Monitoring requirement only. If wastewater land applied exceeds 10 mg/L of nitrate nitrogen as N, then the permittee must utilize nitrogen loading rates to ensure appropriate crop for nutrient uptake.

Nitrogen, Total Kjeldahl

Monitoring requirement only. If wastewater land applied exceeds 150 lbs./acre/year or total nitrogen, then the permittee must utilize nitrogen loading rates to ensure appropriate crop for nutrient uptake.

pH.

Monitoring requirement only. Not to be averaged.

Total Phosphorus as P.

Monitoring requirement only.

Oil and Grease.

Monitoring requirement only. Excessive application of oil and grease has the potential to kill or prevent the growth of vegetation, as well as become a source of pollutants in stormwater.

Total Suspended Solids.

Monitoring requirement only.

PERMITTED FEATURE #002 – Land Application Fields

Limitations derived and established in the below Land Application Field Limitations Table are based on current operations of the facility. Future permit action due to facility modification may contain new operating permit terms and conditions that supersede the terms and conditions, including effluent limitations, of this operating permit.

STORAGE BASIN MONITORING TABLE:

| PARAMETERS | UNIT | DAILY MAX | PREVIOUS PERMIT LIMITS | MINIMUM SAMPLING FREQUENCY | MINIMUM REPORTING FREQUENCY | SAMPLE TYPE |
|------------------------|-------------|-----------|------------------------|----------------------------|-----------------------------|-------------|
| WASTEWATER APPLICATION | | | | | | |
| APPLICATION AREA | Acres | * | new | once/day | once/year | measured |
| APPLICATION RATE | Inches/Acre | * | new | once/day | once/year | measured |
| IRRIGATION PERIOD | Hours | * | new | once/day | once/year | measured |
| VOLUME IRRIGATED | Gallons | * | new | once/day | once/year | measured |

* - Monitoring requirement only

NEW - Parameter not previously established in previous state operating permit.

PERMITTED FEATURE #002 – DERIVATION AND DISCUSSION OF LIMITS:

WASTEWATER APPLICATION:

Application Area

Monitoring requirement only. Monitoring the area will allow the permittee to ensure compliance with 10 CSR 20-6.015(4)(C)1., and are prevent unauthorized discharges. Area in acres is included to determine if proper irrigation is occurring on irrigation fields.

Application Rate

Monitoring requirement only. Monitoring the area will allow the permittee to ensure compliance with 10 CSR 20-6.015(4)(C)1., and are prevent unauthorized discharges.

Irrigation Period

Monitoring requirement only. Monitoring the area will allow the permittee to ensure compliance with 10 CSR 20-6.015(4)(C)1., and are prevent unauthorized discharges.

Volume Irrigated

Monitoring requirement only. Monitoring the area will allow the permittee to ensure compliance with 10 CSR 20-6.015(4)(C)1., and are prevent unauthorized discharges. The number of gallons of wastewater irrigated is included to determine if proper irrigation is occurring on irrigated fields. Wastewater shall be irrigated during suitable conditions so that there is no discharge from the storage basin, holding tanks, or irrigation site. The permittee is expected to take all necessary steps to ensure wastewater is applied in accordance with the requirements of this permit.

UNAUTHORIZED DISCHARGE MONITORING.

| | | | | |
|---|---------|---|-------------------------|-------------|
| PHYSICAL | | | | |
| Flow | MGD | * | once/event [‡] | event total |
| Duration | Hours | * | once/event [‡] | event total |
| CONVENTIONAL | | | | |
| Biological Oxygen Demand, 5 Day | mg/L | * | once/event [‡] | grab |
| Dissolved Oxygen (Minimum [◇]) | mg/L | * | once/event [‡] | grab |
| pH [†] | SU | * | once/event [‡] | grab |
| Total Suspended Solids | mg/L | * | once/event [‡] | grab |
| <i>E. Coli</i> [€] | #/100mL | * | once/event [‡] | grab |
| NUTRIENTS | | | | |
| Ammonia as N | mg/L | * | once/event [‡] | grab |
| MONITORING REPORTS SHALL BE SUBMITTED BY THE 28 TH DAY OF THE MONTH FOLLOWING DISCHARGE CESSATION. | | | | |

* Monitoring and reporting requirement only.

◇ The facility shall report the minimum value obtained if more than one sample was taken.

† The facility shall report the range (minimum to maximum values) if more than one sample is obtained.

‡ Once per event means the facility must take a sample at least once per discharge event. If there was no discharge, a report is not necessary; if a discharge occurred, the facility must report all results of sampling into the eDMR system by the 28th day of the month following the completion of the discharge.

€ Sampling for *E. coli* is only required during the recreational months of April – October.

PERMITTED FEATURES #001 - DERIVATION AND DISCUSSION OF LIMITS:

Flow

Monitoring requirement only.

Duration

Monitoring requirement only.

Biochemical Oxygen Demand - 5 Day (BOD₅)

Monitoring requirement only.

Oxygen, Dissolved

Monitoring requirement only.

Total Suspended Solids

Monitoring requirement only.

pH

Monitoring requirement only.

E. Coli

Monitoring requirements only.

Ammonia as N

Monitoring requirement only.

PART V. ADMINISTRATIVE REQUIREMENTS

On the basis of preliminary staff review and the application of applicable standards and regulations, the Department, as administrative agent for the Missouri Clean Water Commission, proposes to issue a permit(s) subject to certain effluent limitations, schedules, and special conditions contained herein and within the operating permit. The proposed determinations are tentative pending public comment.

PERMIT SYNCHRONIZATION:

The Department of Natural Resources is currently undergoing a synchronization process for operating permits. Permits are normally issued on a five-year term, but to achieve synchronization many permits will need to be issued for less than the full five years allowed by regulation. The intent is all permits within a watershed will move through the Watershed Based Management (WBM) cycle together and all expire in the same fiscal year. <http://dnr.mo.gov/env/wpp/cpp/docs/watershed-based-management.pdf>. This will allow further streamlining by placing multiple permits within a smaller geographic area on public notice simultaneously, thereby reducing repeated administrative efforts. This will also allow the Department to explore a watershed based permitting effort at some point in the future. Renewal applications must continue to be submitted within 180 days of expiration, however, in instances where effluent data from the previous renewal is less than two years old, such data may be re-submitted to meet the requirements of the renewal application. If the permit provides a schedule of compliance for meeting new water quality based effluent limits beyond the expiration date of the permit, the time remaining in the schedule of compliance will be allotted in the renewed permit. With permit synchronization, this permit will expire in the 2nd Quarter of calendar year 2021. If the Department issues the permit at this time, the effective period of the permit would be one year in length. To ensure efficient use of Department staff, reduce the Department's permitting back log and to provide better service to the permittee by avoiding another renewal application to be submitted in such a short time period this operating permit will be issued for the maximum timeframe of five years and synced with other permits in the watershed at a later date.

PUBLIC NOTICE:

The Department shall give public notice a draft permit has been prepared and its issuance is pending. <http://dnr.mo.gov/env/wpp/permits/pn/index.html>. Additionally, public notice will be issued if a public hearing is to be held because of a significant degree of interest in or with water quality concerns related to a draft permit. No public notice is required when a request for a permit modification or termination is denied; however, the requester and permittee must be notified of the denial in writing.

The Department must issue public notice of a pending operating permit or of a new or reissued statewide general permit. The public comment period is the length of time not less than 30 days following the date of the public notice which interested persons may submit written comments about the proposed permit.

For persons wanting to submit comments regarding this proposed operating permit, then please refer to the Public Notice page located at the front of this draft operating permit. The Public Notice page gives direction on how and where to submit appropriate comments.

✓ The Public Notice period for this operating permit was from August 16, 2019 to September 16, 2019. No responses received.

DATE OF FACT SHEET: JULY 12, 2019

COMPLETED BY:

LEASUE MEYERS, EI
MISSOURI DEPARTMENT OF NATURAL RESOURCES
WATER PROTECTION PROGRAM
ENGINEERING SECTION
leasue.meyers@dnr.mo.gov



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
AUGUST 1, 2014

These Standard Conditions incorporate permit conditions as required by 40 CFR 122.41 or other applicable state statutes or regulations. These minimum conditions apply unless superseded by requirements specified in the permit.

Part I – General Conditions

Section A – Sampling, Monitoring, and Recording

1. **Sampling Requirements.**
 - a. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.
 - b. All samples shall be taken at the outfall(s) or Missouri Department of Natural Resources (Department) approved sampling location(s), and unless specified, before the effluent joins or is diluted by any other body of water or substance.
2. **Monitoring Requirements.**
 - a. Records of monitoring information shall include:
 - i. The date, exact place, and time of sampling or measurements;
 - ii. The individual(s) who performed the sampling or measurements;
 - iii. The date(s) analyses were performed;
 - iv. The individual(s) who performed the analyses;
 - v. The analytical techniques or methods used; and
 - vi. The results of such analyses.
 - b. If the permittee monitors any pollutant more frequently than required by the permit at the location specified in the permit using test procedures approved under 40 CFR Part 136, or another method required for an industry-specific waste stream under 40 CFR subchapters N or O, the results of such monitoring shall be included in the calculation and reported to the Department with the discharge monitoring report data (DMR) submitted to the Department pursuant to Section B, paragraph 7.
3. **Sample and Monitoring Calculations.** Calculations for all sample and monitoring results which require averaging of measurements shall utilize an arithmetic mean unless otherwise specified in the permit.
4. **Test Procedures.** The analytical and sampling methods used shall conform to the reference methods listed in 10 CSR 20-7.015 unless alternates are approved by the Department. The facility shall use sufficiently sensitive analytical methods for detecting, identifying, and measuring the concentrations of pollutants. The facility shall ensure that the selected methods are able to quantify the presence of pollutants in a given discharge at concentrations that are low enough to determine compliance with Water Quality Standards in 10 CSR 20-7.031 or effluent limitations unless provisions in the permit allow for other alternatives. A method is “sufficiently sensitive” when; 1) the method minimum level is at or below the level of the applicable water quality criterion for the pollutant or, 2) the method minimum level is above the applicable water quality criterion, but the amount of pollutant in a facility’s discharge is high enough that the method detects and quantifies the level of pollutant in the discharge, or 3) the method has the lowest minimum level of the analytical methods approved under 10 CSR 20-7.015. These methods are also required for parameters that are listed as monitoring only, as the data collected may be used to determine if limitations need to be established. A permittee is responsible for working with their contractors to ensure that the analysis performed is sufficiently sensitive.
5. **Record Retention.** Except for records of monitoring information required by the permit related to the permittee’s sewage sludge use and disposal activities, which shall be retained for a period of at least five (5) years (or longer as required by 40 CFR part 503), the permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by the permit, and records of all data used to complete the application for the permit, for a period of at least three (3) years from the date of the sample, measurement, report or application. This period may be extended by request of the Department at any time.

6. **Illegal Activities.**
 - a. The Federal Clean Water Act provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under the permit shall, upon conviction, be punished by a fine of not more than \$10,000, or by imprisonment for not more than two (2) years, or both. If a conviction of a person is for a violation committed after a first conviction of such person under this paragraph, punishment is a fine of not more than \$20,000 per day of violation, or by imprisonment of not more than four (4) years, or both.
 - b. The Missouri Clean Water Law provides that any person or who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained pursuant to sections 644.006 to 644.141 shall, upon conviction, be punished by a fine of not more than \$10,000, or by imprisonment for not more than six (6) months, or by both. Second and successive convictions for violation under this paragraph by any person shall be punished by a fine of not more than \$50,000 per day of violation, or by imprisonment for not more than two (2) years, or both.

Section B – Reporting Requirements

1. **Planned Changes.**
 - a. The permittee shall give notice to the Department as soon as possible of any planned physical alterations or additions to the permitted facility when:
 - i. The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in 40 CFR 122.29(b); or
 - ii. The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants which are subject neither to effluent limitations in the permit, nor to notification requirements under 40 CFR 122.42;
 - iii. The alteration or addition results in a significant change in the permittee’s sludge use or disposal practices, and such alteration, addition, or change may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan;
 - iv. Any facility expansions, production increases, or process modifications which will result in a new or substantially different discharge or sludge characteristics must be reported to the Department 60 days before the facility or process modification begins. Notification may be accomplished by application for a new permit. If the discharge does not violate effluent limitations specified in the permit, the facility is to submit a notice to the Department of the changed discharge at least 30 days before such changes. The Department may require a construction permit and/or permit modification as a result of the proposed changes at the facility.
2. **Non-compliance Reporting.**
 - a. The permittee shall report any noncompliance which may endanger health or the environment. Relevant information shall be provided orally or via the current electronic method approved by the Department, within 24 hours from the time the permittee becomes aware of the circumstances, and shall be reported to the appropriate Regional Office during normal business hours or the Environmental Emergency Response hotline at 573-634-2436 outside of normal business hours. A written submission shall also be provided within five (5) business days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
AUGUST 1, 2014

- b. The following shall be included as information which must be reported within 24 hours under this paragraph.
 - i. Any unanticipated bypass which exceeds any effluent limitation in the permit.
 - ii. Any upset which exceeds any effluent limitation in the permit.
 - iii. Violation of a maximum daily discharge limitation for any of the pollutants listed by the Department in the permit required to be reported within 24 hours.
 - c. The Department may waive the written report on a case-by-case basis for reports under paragraph 2. b. of this section if the oral report has been received within 24 hours.
3. **Anticipated Noncompliance.** The permittee shall give advance notice to the Department of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements. The notice shall be submitted to the Department 60 days prior to such changes or activity.
 4. **Compliance Schedules.** Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of the permit shall be submitted no later than 14 days following each schedule date. The report shall provide an explanation for the instance of noncompliance and a proposed schedule or anticipated date, for achieving compliance with the compliance schedule requirement.
 5. **Other Noncompliance.** The permittee shall report all instances of noncompliance not reported under paragraphs 2, 3, and 6 of this section, at the time monitoring reports are submitted. The reports shall contain the information listed in paragraph 2. a. of this section.
 6. **Other Information.** Where the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Department, it shall promptly submit such facts or information.
 7. **Discharge Monitoring Reports.**
 - a. Monitoring results shall be reported at the intervals specified in the permit.
 - b. Monitoring results must be reported to the Department via the current method approved by the Department, unless the permittee has been granted a waiver from using the method. If the permittee has been granted a waiver, the permittee must use forms provided by the Department.
 - c. Monitoring results shall be reported to the Department no later than the 28th day of the month following the end of the reporting period.
- b. Notice.
 - i. Anticipated bypass. If the permittee knows in advance of the need for a bypass, it shall submit prior notice, if possible at least 10 days before the date of the bypass.
 - ii. Unanticipated bypass. The permittee shall submit notice of an unanticipated bypass as required in Section B – Reporting Requirements, paragraph 5 (24-hour notice).
 - c. Prohibition of bypass.
 - i. Bypass is prohibited, and the Department may take enforcement action against a permittee for bypass, unless:
 1. Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;
 2. There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance; and
 3. The permittee submitted notices as required under paragraph 2. b. of this section.
 - ii. The Department may approve an anticipated bypass, after considering its adverse effects, if the Department determines that it will meet the three (3) conditions listed above in paragraph 2. c. i. of this section.
3. **Upset Requirements.**
 - a. Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology based permit effluent limitations if the requirements of paragraph 3. b. of this section are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.
 - b. Conditions necessary for a demonstration of upset. A permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:
 - i. An upset occurred and that the permittee can identify the cause(s) of the upset;
 - ii. The permitted facility was at the time being properly operated; and
 - iii. The permittee submitted notice of the upset as required in Section B – Reporting Requirements, paragraph 2. b. ii. (24-hour notice).
 - iv. The permittee complied with any remedial measures required under Section D – Administrative Requirements, paragraph 4.
 - c. Burden of proof. In any enforcement proceeding, the permittee seeking to establish the occurrence of an upset has the burden of proof.

Section C – Bypass/Upset Requirements

1. **Definitions.**
 - a. *Bypass*: the intentional diversion of waste streams from any portion of a treatment facility, except in the case of blending.
 - b. *Severe Property Damage*: substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.
 - c. *Upset*: an exceptional incident in which there is unintentional and temporary noncompliance with technology based permit effluent limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
2. **Bypass Requirements.**
 - a. Bypass not exceeding limitations. The permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to assure efficient operation. These bypasses are not subject to the provisions of paragraphs 2. b. and 2. c. of this section.

Section D – Administrative Requirements

1. **Duty to Comply.** The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Missouri Clean Water Law and Federal Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.
 - a. The permittee shall comply with effluent standards or prohibitions established under section 307(a) of the Federal Clean Water Act for toxic pollutants and with standards for sewage sludge use or disposal established under section 405(d) of the CWA within the time provided in the regulations that establish these standards or prohibitions or standards for sewage sludge use or disposal, even if the permit has not yet been modified to incorporate the requirement.
 - b. The Federal Clean Water Act provides that any person who violates section 301, 302, 306, 307, 308, 318 or 405 of the Act, or any permit condition or limitation implementing any such sections in a permit issued under section 402, or any requirement imposed in a pretreatment program approved under sections 402(a)(3) or 402(b)(8) of the Act, is subject to a civil penalty not to exceed \$25,000 per day for each violation. The Federal Clean Water Act provides that any person who negligently violates sections 301, 302, 306, 307, 308, 318, or 405 of the Act, or any condition or limitation implementing any of such sections in a permit issued under section 402 of the Act, or any requirement



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
AUGUST 1, 2014

imposed in a pretreatment program approved under section 402(a)(3) or 402(b)(8) of the Act, is subject to criminal penalties of \$2,500 to \$25,000 per day of violation, or imprisonment of not more than one (1) year, or both. In the case of a second or subsequent conviction for a negligent violation, a person shall be subject to criminal penalties of not more than \$50,000 per day of violation, or by imprisonment of not more than two (2) years, or both. Any person who knowingly violates such sections, or such conditions or limitations is subject to criminal penalties of \$5,000 to \$50,000 per day of violation, or imprisonment for not more than three (3) years, or both. In the case of a second or subsequent conviction for a knowing violation, a person shall be subject to criminal penalties of not more than \$100,000 per day of violation, or imprisonment of not more than six (6) years, or both. Any person who knowingly violates section 301, 302, 303, 306, 307, 308, 318 or 405 of the Act, or any permit condition or limitation implementing any of such sections in a permit issued under section 402 of the Act, and who knows at that time that he thereby places another person in imminent danger of death or serious bodily injury, shall, upon conviction, be subject to a fine of not more than \$250,000 or imprisonment of not more than 15 years, or both. In the case of a second or subsequent conviction for a knowing endangerment violation, a person shall be subject to a fine of not more than \$500,000 or by imprisonment of not more than 30 years, or both. An organization, as defined in section 309(c)(3)(B)(iii) of the CWA, shall, upon conviction of violating the imminent danger provision, be subject to a fine of not more than \$1,000,000 and can be fined up to \$2,000,000 for second or subsequent convictions.

- c. Any person may be assessed an administrative penalty by the EPA Director for violating section 301, 302, 306, 307, 308, 318 or 405 of this Act, or any permit condition or limitation implementing any of such sections in a permit issued under section 402 of this Act. Administrative penalties for Class I violations are not to exceed \$10,000 per violation, with the maximum amount of any Class I penalty assessed not to exceed \$25,000. Penalties for Class II violations are not to exceed \$10,000 per day for each day during which the violation continues, with the maximum amount of any Class II penalty not to exceed \$125,000.
 - d. It is unlawful for any person to cause or permit any discharge of water contaminants from any water contaminant or point source located in Missouri in violation of sections 644.006 to 644.141 of the Missouri Clean Water Law, or any standard, rule or regulation promulgated by the commission. In the event the commission or the director determines that any provision of sections 644.006 to 644.141 of the Missouri Clean Water Law or standard, rules, limitations or regulations promulgated pursuant thereto, or permits issued by, or any final abatement order, other order, or determination made by the commission or the director, or any filing requirement pursuant to sections 644.006 to 644.141 of the Missouri Clean Water Law or any other provision which this state is required to enforce pursuant to any federal water pollution control act, is being, was, or is in imminent danger of being violated, the commission or director may cause to have instituted a civil action in any court of competent jurisdiction for the injunctive relief to prevent any such violation or further violation or for the assessment of a penalty not to exceed \$10,000 per day for each day, or part thereof, the violation occurred and continues to occur, or both, as the court deems proper. Any person who willfully or negligently commits any violation in this paragraph shall, upon conviction, be punished by a fine of not less than \$2,500 nor more than \$25,000 per day of violation, or by imprisonment for not more than one year, or both. Second and successive convictions for violation of the same provision of this paragraph by any person shall be punished by a fine of not more than \$50,000 per day of violation, or by imprisonment for not more than two (2) years, or both.
2. **Duty to Reapply.**
 - a. If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must apply for and obtain a new permit.
 - b. A permittee with a currently effective site-specific permit shall submit an application for renewal at least 180 days before the expiration date of the existing permit, unless permission for a later date has been granted by the Department. (The Department shall not grant permission

for applications to be submitted later than the expiration date of the existing permit.)

- c. A permittee with currently effective general permit shall submit an application for renewal at least 30 days before the existing permit expires, unless the permittee has been notified by the Department that an earlier application must be made. The Department may grant permission for a later submission date. (The Department shall not grant permission for applications to be submitted later than the expiration date of the existing permit.)
3. **Need to Halt or Reduce Activity Not a Defense.** It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
 4. **Duty to Mitigate.** The permittee shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment.
 5. **Proper Operation and Maintenance.** The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by a permittee only when the operation is necessary to achieve compliance with the conditions of the permit.
 6. **Permit Actions.**
 - a. Subject to compliance with statutory requirements of the Law and Regulations and applicable Court Order, this permit may be modified, suspended, or revoked in whole or in part during its term for cause including, but not limited to, the following:
 - i. Violations of any terms or conditions of this permit or the law;
 - ii. Having obtained this permit by misrepresentation or failure to disclose fully any relevant facts;
 - iii. A change in any circumstances or conditions that requires either a temporary or permanent reduction or elimination of the authorized discharge; or
 - iv. Any reason set forth in the Law or Regulations.
 - b. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.
 7. **Permit Transfer.**
 - a. Subject to 10 CSR 20-6.010, an operating permit may be transferred upon submission to the Department of an application to transfer signed by the existing owner and the new owner, unless prohibited by the terms of the permit. Until such time the permit is officially transferred, the original permittee remains responsible for complying with the terms and conditions of the existing permit.
 - b. The Department may require modification or revocation and reissuance of the permit to change the name of the permittee and incorporate such other requirements as may be necessary under the Missouri Clean Water Law or the Federal Clean Water Act.
 - c. The Department, within 30 days of receipt of the application, shall notify the new permittee of its intent to revoke or reissue or transfer the permit.
 8. **Toxic Pollutants.** The permittee shall comply with effluent standards or prohibitions established under section 307(a) of the Federal Clean Water Act for toxic pollutants and with standards for sewage sludge use or disposal established under section 405(d) of the Federal Clean Water Act within the time provided in the regulations that establish these standards or prohibitions or standards for sewage sludge use or disposal, even if the permit has not yet been modified to incorporate the requirement.
 9. **Property Rights.** This permit does not convey any property rights of any sort, or any exclusive privilege.



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
AUGUST 1, 2014

10. **Duty to Provide Information.** The permittee shall furnish to the Department, within a reasonable time, any information which the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The permittee shall also furnish to the Department upon request, copies of records required to be kept by this permit.
11. **Inspection and Entry.** The permittee shall allow the Department, or an authorized representative (including an authorized contractor acting as a representative of the Department), upon presentation of credentials and other documents as may be required by law, to:
 - a. Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of the permit;
 - b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
 - c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
 - d. Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Federal Clean Water Act or Missouri Clean Water Law, any substances or parameters at any location.
12. **Closure of Treatment Facilities.**
 - a. Persons who cease operation or plan to cease operation of waste, wastewater, and sludge handling and treatment facilities shall close the facilities in accordance with a closure plan approved by the Department.
 - b. Operating Permits under 10 CSR 20-6.010 or under 10 CSR 20-6.015 are required until all waste, wastewater, and sludges have been disposed of in accordance with the closure plan approved by the Department and any disturbed areas have been properly stabilized. Disturbed areas will be considered stabilized when perennial vegetation, pavement, or structures using permanent materials cover all areas that have been disturbed. Vegetative cover, if used, shall be at least 70% plant density over 100% of the disturbed area.
13. **Signatory Requirement.**
 - a. All permit applications, reports required by the permit, or information requested by the Department shall be signed and certified. (See 40 CFR 122.22 and 10 CSR 20-6.010)
 - b. The Federal Clean Water Act provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or non-compliance shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than six (6) months per violation, or by both.
 - c. The Missouri Clean Water Law provides that any person who knowingly makes any false statement, representation or certification in any application, record, report, plan, or other document filed or required to be maintained pursuant to sections 644.006 to 644.141 shall, upon conviction, be punished by a fine of not more than ten thousand dollars, or by imprisonment for not more than six months, or by both.
14. **Severability.** The provisions of the permit are severable, and if any provision of the permit, or the application of any provision of the permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of the permit, shall not be affected thereby.

STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
August 1, 2019

PART III – BIOSOLIDS AND SLUDGE FROM DOMESTIC TREATMENT FACILITIES

SECTION A – GENERAL REQUIREMENTS

1. PART III Standard Conditions pertain to biosolids and sludge requirements under the Missouri Clean Water Law and regulations for domestic and municipal wastewater and also incorporates federal sludge disposal requirements under 40 CFR Part 503 for domestic wastewater. The Environmental Protection Agency (EPA) has principal authority for permitting and enforcement of the federal sludge regulations under 40 CFR Part 503 for domestic biosolids and sludge.
2. PART III Standard Conditions apply only to biosolids and sludge generated at domestic wastewater treatment facilities, including public owned treatment works (POTW) and privately owned facilities.
3. Biosolids and Sludge Use and Disposal Practices:
 - a. The permittee is authorized to operate the biosolids and sludge generating, treatment, storage, use, and disposal facilities listed in the facility description of this permit.
 - b. The permittee shall not exceed the design sludge/biosolids volume listed in the facility description and shall not use biosolids or sludge disposal methods that are not listed in the facility description, without prior approval of the permitting authority.
 - c. For facilities operating under general operating permits that incorporate Standard Conditions PART III, the facility is authorized to operate the biosolids and sludge generating, treatment, storage, use and disposal facilities identified in the original operating permit application, subsequent renewal applications or subsequent written approval by the department.
4. Biosolids or Sludge Received from other Facilities:
 - a. Permittees may accept domestic wastewater biosolids or sludge from other facilities as long as the permittee's design sludge capacity is not exceeded and the treatment facility performance is not impaired.
 - b. The permittee shall obtain a signed statement from the biosolids or sludge generator or hauler that certifies the type and source of the sludge
5. Nothing in this permit precludes the initiation of legal action under local laws, except to the extent local laws are preempted by state law.
6. This permit does not preclude the enforcement of other applicable environmental regulations such as odor emissions under the Missouri Air Pollution Control Law and regulations.
7. This permit may (after due process) be modified, or alternatively revoked and reissued, to comply with any applicable biosolids or sludge disposal standard or limitation issued or approved under Section 405(d) of the Clean Water Act or under Chapter 644 RSMo.
8. In addition to Standard Conditions PART III, the Department may include biosolids and sludge limitations in the special conditions portion or other sections of a site specific permit.
9. Exceptions to Standard Conditions PART III may be authorized on a case-by-case basis by the Department, as follows:
 - a. The Department may modify a site-specific permit following permit notice provisions as applicable under 10 CSR 20-6.020, 40 CFR § 124.10, and 40 CFR § 501.15(a)(2)(ix)(E).
 - b. Exceptions cannot be granted where prohibited by the federal sludge regulations under 40 CFR Part 503.

SECTION B – DEFINITIONS

1. Best Management Practices are practices to prevent or reduce the pollution of waters of the state and include agronomic loading rates (nitrogen based), soil conservation practices, spill prevention and maintenance procedures and other site restrictions.
2. Biosolids means organic fertilizer or soil amendment produced by the treatment of domestic wastewater sludge.
3. Biosolids land application facility is a facility where biosolids are spread onto the land at agronomic rates for production of food, feed or fiber. The facility includes any structures necessary to store the biosolids until soil, weather, and crop conditions are favorable for land application.
4. Class A biosolids means a material that has met the Class A pathogen reduction requirements or equivalent treatment by a Process to Further Reduce Pathogens (PFRP) in accordance with 40 CFR Part 503.
5. Class B biosolids means a material that has met the Class B pathogen reduction requirements or equivalent treatment by a Process to Significantly Reduce Pathogens (PSRP) in accordance with 40 CFR Part 503.
6. Domestic wastewater means wastewater originating from the sanitary conveniences of residences, commercial buildings, factories and institutions; or co-mingled sanitary and industrial wastewater processed by a (POTW) or a privately owned facility.
7. Feed crops are crops produced primarily for consumption by animals.
8. Fiber crops are crops such as flax and cotton.
9. Food crops are crops consumed by humans which include, but is not limited to, fruits, vegetables and tobacco.
10. Industrial wastewater means any wastewater, also known as process wastewater, not defined as domestic wastewater. Per 40 CFR Part 122.2, process wastewater means any water which, during manufacturing or processing, comes into direct contact with or results from the production or use of any raw material, intermediate product, finished product, byproduct, or waste product. Land application of industrial wastewater, residuals or sludge is not authorized by Standard Conditions PART III.
11. Mechanical treatment plants are wastewater treatment facilities that use mechanical devices to treat wastewater, including, sand filters, extended aeration, activated sludge, contact stabilization, trickling filters, rotating biological contact systems, and other similar facilities. It does not include wastewater treatment lagoons or constructed wetlands for wastewater treatment.
12. Plant Available Nitrogen (PAN) is nitrogen that will be available to plants during the growing seasons after biosolids application.
13. Public contact site is land with a high potential for contact by the public. This includes, but is not limited to, public parks, ball fields, cemeteries, plant nurseries, turf farms, and golf courses.
14. Sludge is the solid, semisolid, or liquid residue removed during the treatment of wastewater. Sludge includes septage removed from septic tanks or equivalent facilities. Sludge does not include carbon coal byproducts (CCBs), sewage sludge incinerator ash, or grit/screenings generated during preliminary treatment of domestic sewage.
15. Sludge lagoon is part of a mechanical wastewater treatment facility. A sludge lagoon is an earthen or concrete lined basin that receives sludge that has been removed from a wastewater treatment facility. It does not include a wastewater treatment lagoon or sludge treatment units that are not a part of a mechanical wastewater treatment facility.
16. Septage is the sludge pumped from residential septic tanks, cesspools, portable toilets, Type III marine sanitation devices, or similar treatment works such as sludge holding structures from residential wastewater treatment facilities with design populations of less than 150 people. Septage does not include grease removed from grease traps at a restaurant or material removed from septic tanks and other similar treatment works that have received industrial wastewater. The standard for biosolids from septage is different from other sludges. See Section H for more information.

SECTION C – MECHANICAL WASTEWATER TREATMENT FACILITIES

1. Biosolids or sludge shall be routinely removed from wastewater treatment facilities and handled according to the permit facility description and the requirements of Standard Conditions PART III or in accordance with Section A.3.c., above.
2. The permittee shall operate storage and treatment facilities, as defined by Section 644.016(23), RSMo, so that there is no biosolids or sludge discharged to waters of the state. Agricultural storm water discharges are exempt under the provisions of Section 644.059, RSMo.
3. Mechanical treatment plants shall have separate biosolids or sludge storage compartments in accordance with 10 CSR 20, Chapter 8. Failure to remove biosolids or sludge from these storage compartments on the required design schedule is a violation of this permit.

SECTION D – BIOSOLIDS OR SLUDGE DISPOSED AT OTHER TREATMENT FACILITY OR BY CONTRACT HAULER

1. Permittees that use contract haulers, under the authority of their operating permit, to dispose of biosolids or sludge, are responsible for compliance with all the terms of this permit. Contract haulers that assume the responsibility of the final disposal of biosolids or sludge, including biosolids land application, must obtain a Missouri State Operating Permit unless the hauler transports the biosolids or sludge to another permitted treatment facility.
2. Testing of biosolids or sludge, other than total solids content, is not required if biosolids or sludge are hauled to a permitted wastewater treatment facility, unless it is required by the accepting facility.

SECTION E – INCINERATION OF SLUDGE

1. Please be aware that sludge incineration facilities may be subject to the requirements of 40 CFR Part 503 Subpart E, Missouri Air Conservation Commission regulations under 10 CSR 10, and solid waste management regulations under 10 CSR 80, as applicable.
2. Permittee may be authorized under the facility description of this permit to store incineration ash in lagoons or ash ponds. This permit does not authorize the disposal of incineration ash. Incineration ash shall be disposed in accordance with 10 CSR 80; or, if the ash is determined to be hazardous, with 10 CSR 25.
3. In addition to normal sludge monitoring, incineration facilities shall report the following as part of the annual report, mass of sludge incinerated and mass of ash generated. Permittee shall also provide the name of the ash disposal facility and permit number if applicable.

SECTION F – SURFACE DISPOSAL SITES AND BIOSOLIDS AND SLUDGE LAGOONS

1. Please be aware that surface disposal sites of biosolids or sludge from wastewater treatment facilities may be subject to other laws including the requirements in 40 CFR Part 503 Subpart C, Missouri Air Conservation Commission regulations under 10 CSR 10, and solid waste management regulations under 10 CSR 80, as applicable.
2. Biosolids or sludge storage lagoons are temporary facilities and are not required to obtain a permit as a solid waste management facility under 10 CSR 80. In order to maintain biosolids or sludge storage lagoons as storage facilities, accumulated biosolids or sludge must be removed routinely, but not less than once every two years unless an alternate schedule is approved in the permit. The amount of biosolids or sludge removed will be dependent on biosolids or sludge generation and accumulation in the facility. Enough biosolids or sludge must be removed to maintain adequate storage capacity in the facility.
 - a. In order to avoid damage to the lagoon seal during cleaning, the permittee may leave a layer of biosolids or sludge on the bottom of the lagoon, upon prior approval of the Department; or
 - b. Permittee shall close the lagoon in accordance with Section I.

SECTION G – LAND APPLICATION OF BIOSOLIDS

1. The permittee shall not land apply biosolids unless land application is authorized in the facility description, the special conditions of the issued NPDES permit, or in accordance with Section A.3.c., above.
2. This permit only authorizes “Class A” or “Class B” biosolids derived from domestic wastewater to be land applied onto grass land, crop land, timber, or other similar agricultural or silviculture lands at rates suitable for beneficial use as organic fertilizer and soil conditioner.
3. Class A Biosolids Requirements: Biosolids shall meet Class A requirements for application to public contact sites, residential lawns, home gardens or sold and/or given away in a bag or other container.
4. Class B biosolids that are land applied to agricultural and public contact sites shall comply with the following restrictions:
 - a. Food crops that touch the biosolids/soil mixture and are totally above the land surface shall not be harvested for 14 months after application of biosolids.
 - b. Food crops below the surface of the land shall not be harvested for 20 months after application of biosolids when the biosolids remain on the land surface for four months or longer prior to incorporation into the soil.
 - c. Food crops below the surface of the land shall not be harvested for 38 months after application of biosolids when the biosolids remain on the land surface for less than four months prior to incorporation into the soil.
 - d. Animal grazing shall not be allowed for 30 days after application of biosolids.
 - e. Food crops, feed crops, and fiber crops shall not be harvested for 30 days after application of biosolids.
 - f. Turf shall not be harvested for one year after application of biosolids if used for lawns or high public contact sites in close proximity to populated areas such as city parks or golf courses.
 - g. After Class B biosolids have been land applied to public contact sites with high potential for public exposure, as defined in 40 CFR § 503.31, such as city parks or golf courses, access must be restricted for 12 months.
 - h. After Class B biosolids have been land applied public contact sites with low potential for public exposure as defined in 40 CFR § 503.31, such as a rural land application or reclamation sites, access must be restricted for 30 days.
5. Pollutant limits
 - a. Biosolids shall be monitored to determine the quality for regulated pollutants listed in Table 1, below. Limits for any pollutants not listed below may be established in the permit.
 - b. The number of samples taken is directly related to the amount of biosolids or sludge produced by the facility (See Section J, below). Samples should be taken only during land application periods. When necessary, it is permissible to mix biosolids with lower concentrations of biosolids as well as other suitable Department approved material to achieve pollutant concentration below those identified in Table 1, below.
 - c. Table 1 gives the ceiling concentration for biosolids. Biosolids which exceed the concentrations in Table 1 may not be land applied.

TABLE 1

| Biosolids ceiling concentration | |
|---------------------------------|------------------------------------|
| Pollutant | Milligrams per kilogram dry weight |
| Arsenic | 75 |
| Cadmium | 85 |
| Copper | 4,300 |
| Lead | 840 |
| Mercury | 57 |
| Molybdenum | 75 |
| Nickel | 420 |
| Selenium | 100 |
| Zinc | 7,500 |

- d. Table 2 below gives the low metal concentration for biosolids. Because of its higher quality, biosolids with pollutant concentrations below those listed in Table 2 can safely be applied to agricultural land, forest, public contact sites, lawns, home gardens or be given away without further analysis. Biosolids containing metals in concentrations above the low metals concentrations but below the ceiling concentration limits may be land applied but shall not exceed the annual loading rates in Table 3 and the cumulative loading rates in Table 4. The permittee is required to track pollutant loading onto application sites for parameters that have exceeded the low metal concentration limits.

TABLE 2

| Biosolids Low Metal Concentration | |
|-----------------------------------|------------------------------------|
| Pollutant | Milligrams per kilogram dry weight |
| Arsenic | 41 |
| Cadmium | 39 |
| Copper | 1,500 |
| Lead | 300 |
| Mercury | 17 |
| Nickel | 420 |
| Selenium | 100 |
| Zinc | 2,800 |

- e. Annual pollutant loading rate.

Table 3

| Biosolids Annual Loading Rate | |
|-------------------------------|--------------------------|
| Pollutant | Kg/ha (lbs./ac) per year |
| Arsenic | 2.0 (1.79) |
| Cadmium | 1.9 (1.70) |
| Copper | 75 (66.94) |
| Lead | 15 (13.39) |
| Mercury | 0.85 (0.76) |
| Nickel | 21 (18.74) |
| Selenium | 5.0 (4.46) |
| Zinc | 140 (124.96) |

- f. Cumulative pollutant loading rates.

Table 4

| Biosolids Cumulative Pollutant Loading Rate | |
|---|-----------------|
| Pollutant | Kg/ha (lbs./ac) |
| Arsenic | 41 (37) |
| Cadmium | 39 (35) |
| Copper | 1500 (1339) |
| Lead | 300 (268) |
| Mercury | 17 (15) |
| Nickel | 420 (375) |
| Selenium | 100 (89) |
| Zinc | 2800 (2499) |

6. Best Management Practices. The permittee shall use the following best management practices during land application activities to prevent the discharge of biosolids to waters of the state.
- Biosolids shall not be applied to the land if it is likely to adversely affect a threatened or endangered species listed under § 4 of the Endangered Species Act or its designated critical habitat.
 - Apply biosolids only at the agronomic rate of nitrogen needed (see 5.c. of this section).
 - The applicator must document the Plant Available Nitrogen (PAN) loadings, available nitrogen in the soil, and crop

nitrogen removal when either of the following occurs: 1) When biosolids are greater than 50,000 mg/kgTN; or 2) When biosolids are land applied at an application rate greater than two dry tons per acre per year.

- i. PAN can be determined as follows:
(Nitrate + nitrite nitrogen) + (organic nitrogen x 0.2) + (ammonia nitrogen x volatilization factor¹).
¹ Volatilization factor is 0.7 for surface application and 1 for subsurface application. Alternative volatilization factors and mineralization rates can be utilized on a case-by-case basis.
- ii. Crop nutrient production/removal to be based on crop specific nitrogen needs and realistic yield goals. **NOTE:** There are a number of reference documents on the Missouri Department of Natural Resources website that are informative to implement best management practices in the proper management of biosolids, including crop specific nitrogen needs, realistic yields on a county by county basis and other supporting references.
- iii. Biosolids that are applied at agronomic rates shall not cause the annual pollutant loading rates identified in Table 3 to be exceeded.
- d. Buffer zones are as follows:
 - i. 300 feet of a water supply well, sinkhole, water supply reservoir or water supply intake in a stream;
 - ii. 300 feet of a losing stream, no discharge stream, stream stretches designated for whole body contact recreation, wild and scenic rivers, Ozark National Scenic Riverways or outstanding state resource waters as listed in the Water Quality Standards, 10 CSR 20-7.031;
 - iii. 150 feet of dwellings or public use areas;
 - iv. 100 feet (35 feet if biosolids application is down-gradient or the buffer zone is entirely vegetated) of lake, pond, wetlands or gaining streams (perennial or intermittent);
 - v. 50 feet of a property line. Buffer distances from property lines may be waived with written permission from neighboring property owner.
 - vi. For the application of dry, cake or liquid biosolids that are subsurface injected, buffer zones identified in 5.d.i. through 5.d.iii above, may be reduced to 100 feet. The buffer zone may be reduced to 35 feet if the buffer zone is permanently vegetated. Subsurface injection does not include methods or technology reflective of combination surface/shallow soil incorporation.
- e. Slope limitation for application sites are as follows:
 - i. For slopes less than or equal to 6 percent, no rate limitation;
 - ii. Applied to a slope 7 to 12 percent, the applicator may apply biosolids when soil conservation practices are used to meet the minimum erosion levels;
 - iii. Slopes > 12 percent, apply biosolids only when grass is vegetated and maintained with at least 80 percent ground cover at a rate of two dry tons per acre per year or less.
 - iv. Dry, cake or liquid biosolids that are subsurface injected, may be applied on slopes not to exceed 20 percent. Subsurface injection does not include the use of methods or technology reflective of combination surface/shallow soil incorporation.
- f. No biosolids may be land applied in an area that it is reasonably certain that pollutants will be transported into waters of the state.
- g. Biosolids may be land applied to sites with soil that are snow covered, frozen, or saturated with liquid when site restrictions or other controls are provided to prevent pollutants from being discharged to waters of the state during snowmelt or stormwater runoff. During inclement weather or unfavorable soil conditions use the following management practices:
 - i. A maximum field slope of 6% and a minimum 300 feet grass buffer between the application site and waters of the state. A 35 feet grass buffer may be utilized for the application of dry, cake or liquid biosolids that are subsurface injected. Subsurface injection does not include the use of methods or technology reflective of combination surface/shallow soil incorporation;
 - ii. A maximum field slope of 2% and 100 feet grass buffer between the application site and waters of the state. A 35 feet grass buffer may be used for the application of dry, cake or liquid biosolids that are subsurface injected. Subsurface injection does not include the use of methods or technology reflective of combination surface/shallow soil incorporation;
 - iii. Other best management practices approved by the Department.

SECTION H – SEPTAGE

1. Haulers that land apply septage must obtain a state permit. An operating permit is not required for septage haulers who transport septage to another permitted treatment facility for disposal.
2. Do not apply more than 30,000 gallons of septage per acre per year or the volume otherwise stipulated in the operating permit.
3. Septic tanks are designed to retain sludge for one to three years which will allow for a larger reduction in pathogens and vectors, as compared to mechanical treatment facilities.
4. Septage must comply with Class B biosolids regarding pathogen and vector attraction reduction requirements before it may be applied to crops, pastures or timberland. To meet required pathogen and vector reduction requirements, mix 50 pounds of hydrated lime for every 1,000 gallons of septage and maintain a septage pH of at least 12 pH standard units for 30 minutes or more prior to application.
5. Lime is to be added to the pump truck and not directly to the septic tanks, as lime would harm the beneficial bacteria of the septic tank.
6. As residential septage contains relatively low levels of metals, the testing of metals in septage is not required.

SECTION I– CLOSURE REQUIREMENTS

1. This section applies to all wastewater facilities (mechanical and lagoons) and sludge or biosolids storage and treatment facilities. It does not apply to land application sites.
2. Permittees of a domestic wastewater facility who plan to cease operation must obtain Department approval of a closure plan which addresses proper removal and disposal of all sludges and/or biosolids. Permittee must maintain this permit until the facility is closed in accordance with the approved closure plan per 10 CSR 20 – 6.010 and 10 CSR 20 – 6.015.
3. Biosolids or sludge that are left in place during closure of a lagoon or earthen structure or ash pond shall not exceed the agricultural loading rates as follows:
 - a. Biosolids and sludge shall meet the monitoring and land application limits for agricultural rates as referenced in Section G, above.
 - b. If a wastewater treatment lagoon has been in operation for 15 years or more without sludge removal, the sludge in the lagoon qualifies as a Class B biosolids with respect to pathogens due to anaerobic digestion, and testing for fecal coliform is not required. For other lagoons, testing for fecal coliform is required to show compliance with Class B biosolids limitations. In order to reach Class B biosolids requirements, fecal coliform must be less than 2,000,000 colony forming units or 2,000,000 most probable number. All fecal samples must be presented as geometric mean per gram.
 - c. The allowable nitrogen loading that may be left in the lagoon shall be based on the plant available nitrogen (PAN) loading. For a grass cover crop, the allowable PAN is 300 pounds/acre. Alternative, site-specific application rates may be included in the closure plan for department consideration.
 - i. PAN can be determined as follows:
$$(\text{Nitrate} + \text{nitrite nitrogen}) + (\text{organic nitrogen} \times 0.2) + (\text{ammonia nitrogen} \times \text{volatilization factor}^1).$$
¹ Volatilization factor is 0.7 for surface application and 1 for subsurface application. Alternative volatilization factors and mineralization rates can be utilized on a case-by-case basis.
4. Domestic wastewater treatment lagoons with a design treatment capacity less than or equal to 150 persons, are “similar treatment works” under the definition of septage. Therefore the sludge within the lagoons may be treated as septage during closure activities. See Section B, above. Under the septage category, residuals may be left in place as follows:
 - a. Testing for metals or fecal coliform is not required.
 - b. If the wastewater treatment lagoon has been in use for less than 15 years, mix lime with the sludge at a rate of 50 pounds of hydrated lime per 1000 gallons (134 cubic feet) of sludge.
 - c. The amount of sludge that may be left in the lagoon shall be based on the plant available nitrogen (PAN) loading. 100 dry tons/acre of sludge may be left in the basin without testing for nitrogen. If 100 dry tons/acre or more will be left in the lagoon, test for nitrogen and determine the PAN using the calculation above. Allowable PAN loading is 300 pounds/acre.
5. Biosolids or sludge left within the domestic lagoon shall be mixed with soil on at least a 1 to 1 ratio, and unless otherwise approved, the lagoon berm shall be demolished, and the site shall be graded and contain $\geq 70\%$ vegetative density over 100% of the site so as to avoid ponding of storm water and provide adequate surface water drainage without creating erosion. Alternative biosolids or sludge and soil mixing ratios may be included in the closure plan for department consideration.
6. Lagoon and earthen structure closure activities shall obtain a storm water permit for land disturbance activities that equal or exceed one acre in accordance with 10 CSR 20-6.200.
7. When closing a mechanical wastewater plant, all biosolids or sludge must be cleaned out and disposed of in accordance with the Department approved closure plan before the permit for the facility can be terminated.
 - a. Land must be stabilized which includes any grading, alternate use or fate upon approval by the Department, remediation, or other work that exposes sediment to stormwater per 10 CSR 20-6.200. The site shall be graded and contain $\geq 70\%$ vegetative density over 100% of the site, so as to avoid ponding of storm water and provide adequate

- surface water drainage without creating erosion.
- b. Hazardous Waste shall not be land applied or disposed during mechanical plant closures unless in accordance with Missouri Hazardous Waste Management Law and Regulations pursuant to 10 CSR 25.
 - c. After demolition of the mechanical plant, the site must only contain clean fill defined in Section 260.200.1(6) RSMo as uncontaminated soil, rock, sand, gravel, concrete, asphaltic concrete, cinderblocks, brick, minimal amounts of wood and metal, and inert solids as approved by rule or policy of the Department for fill, reclamation, or other beneficial use. Other solid wastes must be removed.
8. If biosolids or sludge from the domestic lagoon or mechanical treatment plant exceeds agricultural rates under Section G and/or I, a landfill permit or solid waste disposal permit must be obtained if the permittee chooses to seek authorization for on-site sludge disposal under the Missouri Solid Waste Management Law and regulations per 10 CSR 80, and the permittee must comply with the surface disposal requirements under 40 CFR Part 503, Subpart C.

SECTION J – MONITORING FREQUENCY

1. At a minimum, biosolids or sludge shall be tested for volume and percent total solids on a frequency that will accurately represent sludge quantities produced and disposed. Please see the table below.

TABLE 5

| Biosolids or Sludge produced and disposed (Dry Tons per Year) | Monitoring Frequency (See Notes 1, and 2) | | |
|---|--|---|----------------------------------|
| | Metals, Pathogens and Vectors, Total Phosphorus, Total Potassium | Nitrogen TKN, Nitrogen PAN ¹ | Priority Pollutants ² |
| 319 or less | 1/year | 1 per month | 1/year |
| 320 to 1650 | 4/year | 1 per month | 1/year |
| 1651 to 16,500 | 6/year | 1 per month | 1/year |
| 16,501+ | 12/year | 1 per month | 1/year |

¹ Calculate plant available nitrogen (PAN) when either of the following occurs: 1) when biosolids are greater than 50,000 mg/kg TN; or 2) when biosolids are land applied at an application rate greater than two dry tons per acre per year.

² Priority pollutants (40 CFR 122.21, Appendix D, Tables II and III) are required only for permit holders that must have a pre-treatment program. Monitoring requirements may be modified and incorporated into the operating permit by the Department on a case-by-case basis.

Note 1: Total solids: A grab sample of sludge shall be tested one per day during land application periods for percent total solids. This data shall be used to calculate the dry tons of sludge applied per acre.

Note 2: Table 5 is not applicable for incineration and permit holders that landfill their sludge.

2. Permittees that operate wastewater treatment lagoons, peak flow equalization basins, combined sewer overflow basins or biosolids or sludge lagoons that are cleaned out once a year or less, may choose to sample only when the biosolids or sludge is removed or the lagoon is closed. Test one composite sample for each 319 dry tons of biosolids or sludge removed from the lagoon during the reporting year or during lagoon closure. Composite sample must represent various areas at one-foot depth.
3. Additional testing may be required in the special conditions or other sections of the permit.
4. Biosolids and sludge monitoring shall be conducted in accordance with federal regulation 40 CFR § 503.8, Sampling and analysis.

SECTION K – RECORD KEEPING AND REPORTING REQUIREMENTS


1. The permittee shall maintain records on file at the facility for at least five years for the items listed in Standard Conditions PART III and any additional items in the Special Conditions section of this permit. This shall include dates when the biosolids or sludge facility is checked for proper operation, records of maintenance and repairs and other relevant information.
2. Reporting period
 - a. By February 19th of each year, applicable facilities shall submit an annual report for the previous calendar year period for all mechanical wastewater treatment facilities, sludge lagoons, and biosolids or sludge disposal facilities.
 - b. Permittees with wastewater treatment lagoons shall submit the above annual report only when biosolids or sludge are removed from the lagoon during the report period or when the lagoon is closed.
3. Report Form. The annual report shall be prepared on report forms provided by the Department or equivalent forms approved by the Department.
4. Reports shall be submitted as follows:
Major facilities, which are those serving 10,000 persons or more or with a design flow equal to or greater than 1 million gallons per day or that are required to have an approved pretreatment program, shall report to both the Department and EPA if the facility land applied, disposed of biosolids by surface disposal, or operated a sewage sludge incinerator. All other facilities shall maintain their biosolids or sludge records and keep them available to Department personnel upon request. State reports shall be submitted to the address listed as follows:

DNR regional or other applicable office listed in the
permit (see cover letter of permit)
ATTN: Sludge Coordinator

Reports to EPA must be electronically submitted online via the Central Data Exchange at: <https://cdx.epa.gov/> Additional information is available at: <https://www.epa.gov/biosolids/compliance-and-annual-reporting-guidance-about-clean-water-act-laws>

5. Annual report contents. The annual report shall include the following:
 - a. Biosolids and sludge testing performed. If testing was conducted at a greater frequency than what is required by the permit, all test results must be included in the report.
 - b. Biosolids or sludge quantity shall be reported as dry tons for the quantity produced and/or disposed.
 - c. Gallons and % solids data used to calculate the dry ton amounts.
 - d. Description of any unusual operating conditions.
 - e. Final disposal method, dates, and location, and person responsible for hauling and disposal.
 - i. This must include the name and address for the hauler and sludge facility. If hauled to a municipal wastewater treatment facility, sanitary landfill, or other approved treatment facility, give the name of that facility.
 - ii. Include a description of the type of hauling equipment used and the capacity in tons, gallons, or cubic feet.
 - f. Contract Hauler Activities:

If using a contract hauler, provide a copy of a signed contract from the contractor. Permittee shall require the contractor to supply information required under this permit for which the contractor is responsible. The permittee shall submit a signed statement from the contractor that he has complied with the standards contained in this permit, unless the contract hauler has a separate biosolids or sludge use permit.
 - g. Land Application Sites:
 - i. Report the location of each application site, the annual and cumulative dry tons/acre for each site, and the landowners name and address. The location for each spreading site shall be given as a legal description for nearest ¼, ¼, Section, Township, Range, and county, or UTM coordinates. The facility shall report PAN when either of the following occurs: 1) When biosolids are greater than 50,000 mg/kg TN; or 2) when biosolids are land applied at an application rate greater than two dry tons per acre per year.
 - ii. If the “Low Metals” criteria are exceeded, report the annual and cumulative pollutant loading rates in pounds per acre for each applicable pollutant, and report the percent of cumulative pollutant loading which has been reached at each site.
 - iii. Report the method used for compliance with pathogen and vector attraction requirements.
 - iv. Report soil test results for pH and phosphorus. If no soil was tested during the year, report the last date when tested and the results.



MISSOURI DEPARTMENT OF NATURAL RESOURCES
WATER PROTECTION PROGRAM
**FORM A – APPLICATION FOR NONDOMESTIC PERMIT UNDER MISSOURI
CLEAN WATER LAW**

FOR AGENCY USE ONLY

CHECK NUMBER

DATE RECEIVED

FEE SUBMITTED

JET PAY CONFIRMATION NUMBER

**PLEASE READ ALL THE ACCOMPANYING INSTRUCTIONS BEFORE COMPLETING THIS FORM.
SUBMITTAL OF AN INCOMPLETE APPLICATION MAY RESULT IN THE APPLICATION BEING RETURNED.**

IF YOUR FACILITY IS ELIGIBLE FOR A NO EXPOSURE EXEMPTION:

Fill out the No Exposure Certification Form (Mo 780-2828): <https://dnr.mo.gov/forms/780-2828-f.pdf>

1. REASON FOR APPLICATION:

- ☐ a. This facility is now in operation under Missouri State Operating Permit (permit) MO – _____, is submitting an application for renewal, and there is no proposed increase in design wastewater flow. Annual fees will be paid when invoiced and there is no additional permit fee required for renewal.
- ☐ b. This facility is now in operation under permit MO – _____, is submitting an application for renewal, and there is a proposed increase in design wastewater flow. Antidegradation Review may be required. Annual fees will be paid when invoiced and there is no additional permit fee required for renewal.
- ☒ c. This is a facility submitting an application for a new permit (for a new facility). Antidegradation Review may be required. New permit fee is required.
- ☐ d. This facility is now in operation under Missouri State Operating Permit (permit) MO – _____ and is requesting a modification to the permit. Antidegradation Review may be required. Modification fee is required.

2. FACILITY

| | | | |
|---------------------------------------|------------------|---|-------------------|
| NAME Mid-States Specialty Eggs LLC | | TELEPHONE NUMBER WITH AREA CODE 660-827-3447 | |
| ADDRESS (PHYSICAL) 30911 Hwy HH | CITY Smithton | STATE MO | ZIP CODE 65350 |

3. OWNER

| | | | |
|---------------------------------------|------------------|---|-------------------|
| NAME Mid-States Specialty Eggs LLC | | TELEPHONE NUMBER WITH AREA CODE 660-827-3447 | |
| EMAIL ADDRESS dale.s@msseggs.com | | | |
| ADDRESS (MAILING) 30911 Hwy HH | CITY Smithton | STATE MO | ZIP CODE 65350 |

4. CONTINUING AUTHORITY

| | | | |
|---------------------------------------|------------------|---|-------------------|
| NAME Mid-States Specialty Eggs LLC | | TELEPHONE NUMBER WITH AREA CODE 660-827-3447 | |
| EMAIL ADDRESS dale.s@msseggs.com | | | |
| ADDRESS (MAILING) 30911 Hwy HH | CITY Smithton | STATE MO | ZIP CODE 65350 |

5. OPERATOR CERTIFICATION

| | | | |
|-------------------|--------------------|---------------------------------|----------|
| NAME NA | CERTIFICATE NUMBER | TELEPHONE NUMBER WITH AREA CODE | |
| ADDRESS (MAILING) | CITY | STATE | ZIP CODE |

6. FACILITY CONTACT

| | | |
|--------------------------------------|-------------------------|---|
| NAME Dale Shrock | TITLE Vice President | TELEPHONE NUMBER WITH AREA CODE 660-827-3447 |
| E-MAIL ADDRESS dale.s@msseggs.com | | |

7. DOWNSTREAM LANDOWNER(S) Attach additional sheets as necessary.

| | | | |
|---|------------------|-------------|-------------------|
| NAME Tina & David Hern downstream of facility (no discharge); Dale W & Susan C Slaughter 20947 Hwy O downstream of land application. | | | |
| ADDRESS 21850 Glenn Road | CITY Smithton | STATE MO | ZIP CODE 65350 |

MO 780-1479 (02-19)

8. ADDITIONAL FACILITY INFORMATION**8.1 Legal Description of Outfalls. (Attach additional sheets if necessary.)**

For Universal Transverse Mercator (UTM), use Zone 15 North referenced to North American Datum 1983 (NAD83)

001 $\frac{1}{4}$ $\frac{1}{4}$ Sec 16 T 46 R 20 Pettis County *Holding basin (NO Discharge)*
UTM Coordinates Easting (X): Northing (Y):
002 $\frac{1}{4}$ $\frac{1}{4}$ Sec 17 T 46 R 20 Pettis County *Land application*
UTM Coordinates Easting (X): Northing (Y):
003 $\frac{1}{4}$ $\frac{1}{4}$ Sec T R County
UTM Coordinates Easting (X): Northing (Y):
004 $\frac{1}{4}$ $\frac{1}{4}$ Sec T R County
UTM Coordinates Easting (X): Northing (Y):

8.2 Primary Standard Industrial Classification (SIC) and Facility North American Industrial Classification System (NAICS) Codes.

Primary SIC 2054 and NAICS 1123 SIC and NAICS
SIC and NAICS SIC and NAICS

9. ADDITIONAL FORMS AND MAPS NECESSARY TO COMPLETE THIS APPLICATION

- A. Is this permit for a manufacturing, commercial, mining, solid/hazardous waste, or silviculture facility? YES ☐ NO ☒
If yes, complete Form C.
- B. Is the facility considered a "Primary Industry" under EPA guidelines (40 CFR Part 122, Appendix A) : YES ☐ NO ☒
If yes, complete Forms C and D.
- C. Is wastewater land applied? YES ☒ NO ☐
If yes, complete Form I.
- D. Are sludge, biosolids, ash, or residuals generated, treated, stored, or land applied? YES ☒ NO ☐
If yes, complete Form R.
- E. Have you received or applied for any permit or construction approval under the CWA or any other environmental regulatory authority? YES ☐ NO ☒
If yes, please include a list of all permits or approvals for this facility.
- F. Do you use cooling water in your operations at this facility? YES ☐ NO ☒
If yes, please indicate the source of the water:
- G. Attach a map showing all outfalls and the receiving stream at 1" = 2,000' scale.

10. ELECTRONIC DISCHARGE MONITORING REPORT (eDMR) SUBMISSION SYSTEM

Per 40 CFR Part 127 National Pollutant Discharge Elimination System (NPDES) Electronic Reporting Rule, reporting of effluent limits and monitoring shall be submitted by the permittee via an electronic system to ensure timely, complete, accurate, and nationally consistent set of data. **One of the following must be checked in order for this application to be considered complete.** Please visit <http://dnr.mo.gov/env/wpp/edmr.htm> to access the Facility Participation Package.

- ☐ - You have completed and submitted with this permit application the required documentation to participate in the eDMR system.
- ☐ - You have previously submitted the required documentation to participate in the eDMR system and/or you are currently using the eDMR system.
- ☐ - You have submitted a written request for a waiver from electronic reporting. See instructions for further information regarding waivers.

11. FEES

Permit fees may be paid by attaching a check, or online by credit card or eCheck through the JetPay system. Use the URL provided to access JetPay and make an online payment: <https://magic.collectorsolutions.com/magic-ui/payments/mo-natural-resources/>

12. CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

NAME AND OFFICIAL TITLE (TYPE OR PRINT)

Dale Shrock, Vice President

TELEPHONE NUMBER WITH AREA CODE

660-827-3447

SIGNATURE

Dale Shrock

DATE SIGNED

6-3-19



MISSOURI DEPARTMENT OF NATURAL RESOURCES
WATER PROTECTION PROGRAM, WATER POLLUTION CONTROL BRANCH
**FORM C – APPLICATION FOR DISCHARGE PERMIT – MANUFACTURING, COMMERCIAL,
MINING, SILVICULTURE OPERATIONS, AND STORMWATER**

GENERAL INFORMATION (PLEASE SEE INSTRUCTIONS)

1.0 NAME OF FACILITY

Mid-States Specialty Eggs LLC

1.1 THIS FACILITY IS OPERATING UNDER MISSOURI STATE OPERATING PERMIT (MSOP) NUMBER:

N/A

1.2 IS THIS A NEW FACILITY? PROVIDE CONSTRUCTION PERMIT (CP) NUMBER IF APPLICABLE.

See other application for construction permit.

1.3 Describe the nature of the business, in detail. Identify the goods and services provided by the business. Include descriptions of all raw, intermediate, final products, byproducts, or waste products used in the production or manufacturing process, stored outdoors, loaded or transferred and any other pertinent information for potential sources of wastewater or stormwater discharges.

To provide customers with the highest quality of fresh specialty egg products and the highest standard of excellence with honest customer service, while providing our community with a sustainable work environment and our family farms a financially stable business opportunity.

No potential sources of stormwater discharges.

FLOWS, TYPE, AND FREQUENCY

2.0 Attach a line drawing showing the water flow through the facility. Indicate sources of intake water, operations contributing wastewater to the effluent, and treatment units labeled to correspond to the more detailed descriptions in Item B. Construct a water balance on the line drawing by showing average and maximum flows between intakes, operations, treatment units, evaporation, public sewers, and outfalls. If a water balance cannot be determined (e.g., for certain mining activities), provide a pictorial description of the nature and amount of any sources of water and any collection or treatment measures.

2.1 For each outfall (1) below, provide: (2) a description of all operations contributing wastewater to the effluent, including process wastewater, sanitary wastewater, cooling water, stormwater runoff, and any other process or non-process wastewater, (3) the average flow and maximum flow (put max in parentheses) contributed by each operation and the sum of those operations, (4) the treatment received by the wastewater, and (5) the treatment type code. Continue on additional sheets if necessary.

| 1. OUTFALL NO. | 2. OPERATION(S) CONTRIBUTING FLOW; INCLUDE ALL PROCESSES AND SUB PROCESSES AT EACH OUTFALL | 3. AVERAGE FLOW AND (MAXIMUM FLOW), INCLUDE UNITS. | 4. TREATMENT DESCRIPTION | 5. TREATMENT CODES FROM TABLE A |
|----------------|--|--|--------------------------|---------------------------------|
| | | | Land application. | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Attach additional pages if necessary.

2.2 INTERMITTENT DISCHARGES

Except for stormwater runoff, leaks, or spills, are any of the discharges described in items 2.0 or 2.1 intermittent or seasonal?

☐ Yes (complete the following table)

☒ No (go to section 2.3)

| 1. OUTFALL NUMBER | 2. OPERATION(S) CONTRIBUTING FLOW | 3. FREQUENCY | | 4. FLOW | | | | C. DURATION (in days) |
|-------------------------|-----------------------------------|---|---|-----------------------|----------------------------|---|-----------------------|--------------------------|
| | | | | A. FLOW RATE (in mgd) | | B. TOTAL VOLUME (specify with units) | | |
| | | A. DAYS PER WEEK (specify average) | B. MONTHS PER YEAR (specify average) | 1. MAXIMUM DAILY | 2. LONG TERM AVERAGE | 4. LONG TERM DAILY | 3. MAXIMUM AVERAGE | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

2.3 PRODUCTION

A. Does an effluent limitation guideline (ELG) promulgated by EPA under section 304 of the Clean Water Act apply to your facility? Indicate the part and subparts applicable.

☐ Yes 40 CFR _____ Subpart(s) _____ ☒ No (go to section 2.5)

B. Are the limitations in the effluent guideline(s) expressed in terms of production (or other measure of operation)? Describe in C below.

☐ Yes (complete C.) ☐ No (go to section 2.5)

C. If you answered "yes" to B, list the quantity representing an actual measurement of your maximum level of production, expressed in the terms and units used in the applicable effluent guideline and indicate the affected outfalls.

| A. OUTFALL(S) | B. QUANTITY PER DAY | C. UNITS OF MEASURE | D. OPERATION, PRODUCT, MATERIAL, ETC. (specify) |
|---------------|---------------------|---------------------|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

2.4 IMPROVEMENTS

A. Are you required by any federal, state, or local authority to meet any implementation schedule for the construction, upgrading, or operation of wastewater treatment equipment or practices or any other environmental programs which may affect the discharges described in this application? This includes, but is not limited to, permit conditions, administrative or enforcement orders, enforcement compliance schedule letters, stipulations, court orders, and grant or loan conditions.

☐ Yes (complete the following table) ☐ No (go to 2.6)

| 1. IDENTIFICATION OF CONDITION, AGREEMENT, ETC. | 2. AFFECTED OUTFALLS | 3. BRIEF DESCRIPTION OF PROJECT | 4. FINAL COMPLIANCE DATE | |
|---|----------------------|---------------------------------|--------------------------|--------------|
| | | | A. REQUIRED | B. PROJECTED |
| | | | | |
| | | | | |

B. Optional: provide below or attach additional sheets describing water pollution control programs or other environmental projects which may affect discharges. Indicate whether each program is underway or planned, and indicate actual or planned schedules for construction. This may include proposed bmp projects for stormwater.

2.5 SLUDGE MANAGEMENT

Describe the removal of any industrial or domestic biosolids or sludges generated at your facility. Include names and contact information for any hauliers used. Note the frequency, volume, and methods (incineration, landfilling, composting, etc) used. See Form A for additional forms which may need to be completed.

Sludge will be handled mostly through the settling/ pretreatment basin. If needed, the holding basin has excess storage within the bottom 2 feet for sludge. Regular monitoring of the sludge will be performed. Any removal of sludge will be per DNR requirements.

DATA COLLECTION AND REPORTING REQUIREMENTS FOR APPLICANTS

3.0 EFFLUENT (AND INTAKE) CHARACTERISTICS (SEE INSTRUCTIONS)

see attached effluent report.

A. & B. See instructions before continuing – complete one Table 1 for **each outfall** (and intake) – annotate the outfall (intake) number or designation in the space provided. The facility is not required to complete intake data unless required by the department or rule.

C. Use the space below to list any pollutants listed in the instructions section 3.0 C. Table B which you know or have reason to believe is discharged or may be discharged from any outfall not listed in parts 3.0 A or B on Table 1. For every pollutant listed, briefly describe the reasons you believe it to be present and report any analytical data in your possession.

| 1. POLLUTANT | 2. SOURCE | 3. OUTFALL(S) | 4. ANALYTICAL RESULTS (INCLUDE UNITS) |
|--------------|-----------|---------------|---------------------------------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

3.1 Whole Effluent Toxicity Testing

A. To your knowledge, have any Whole Effluent Toxicity (WET) tests been performed on the facility discharges (or on receiving waters in relation to your discharge) within the last three years?

☐ Yes (go to 3.1 B)

☐ No (go to 3.2)

3.1 B

Disclose wet testing conditions, including test duration (chronic or acute), the organisms tested, and the testing results. Provide any results of toxicity identification evaluations (TIE) or toxicity reduction evaluations (TRE) if applicable. Please indicate the conclusions of the test(s) including any pollutants identified as causing toxicity and steps the facility is taking to remedy the toxicity.

3.2 CONTRACT ANALYSIS INFORMATION

Were any of the analyses reported herein, above, or on Table 1 performed by a contract laboratory or consulting firm?

☐ Yes (list the name, address, telephone number, and pollutants analyzed by each laboratory or firm.) ☐ No (go to 4.0)

| A. LAB NAME | B. ADDRESS | C. TELEPHONE (area code and number) | D. POLLUTANTS ANALYZED (list or group) |
|-------------|------------|--|---|
| | | | |
| | | | |

4.0 STORMWATER

4.1

Do you have industrial stormwater discharges from the site? ^{NO} If so, attach a site map outlining drainage areas served by each outfall. Indicate the following attributes within each drainage area: pavement or other impervious surfaces; buildings; outdoor storage areas; material loading and unloading areas; outdoor industrial activities; structural stormwater control measures; hazardous waste treatment, storage, and disposal units; and wells or springs in the area.

| OUTFALL NUMBER | TOTAL AREA DRAINED (PROVIDE UNITS) | TYPES OF SURFACES (VEGETATED, STONE, PAVED, ETC) | BEST MANAGEMENT PRACTICES EMPLOYED; INCLUDE STRUCTURAL BMPs AND TREATMENT DESIGN FLOW FOR BMPs DESCRIBE HOW FLOW IS MEASURED |
|-------------------|--|---|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

4.2 STORMWATER FLOWS

Provide the date of sampling with the flows, and how the flows were estimated.

N/A

SIGNATORY REQUIREMENTS

5.0 CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

| | |
|---|---------------------------------|
| NAME AND OFFICIAL TITLE (TYPE OR PRINT) | TELEPHONE NUMBER WITH AREA CODE |
| Dale Shrock | 660-827-3447 |
| SIGNATURE (SEE INSTRUCTIONS) | DATE SIGNED |
| Dale Shrock | 6-3-19 |

See attached effluent report.

FORM C TABLE 1 FOR 3.0 - ITEMS A AND B

SEE INSTRUCTIONS; PLEASE PRINT OR TYPE.
You may report some or all of this information on separate sheet (use similar format) instead of completing these pages.

| EFFLUENT (AND INTAKE) CHARACTERISTICS | | | | | | | | | | THIS OUTFALL IS: | | OUTFALL NO. | |
|---|------------------------|--------------------|--------------------------|----------|-----------------------------|----------|--------------------------|-----------------------------|-----------------------------------|-------------------|--------------------|-------------------|---------|
| 3.0 PART A - You must provide the results of at least one analysis for every pollutant in Part A. Complete one table for each outfall or proposed outfall. See instructions. | | | | | | | | | | | | | |
| 2. VALUES | | | | | | | | | | | | | |
| 1. POLLUTANT | A. MAXIMUM DAILY VALUE | | B. MAXIMUM 30 DAY VALUES | | C. LONG TERM AVERAGE VALUES | | D. NO. OF ANALYSES | 3. UNITS (specify if blank) | | A. CONCEN-TRATION | B. MASS | | |
| | (1) CONCENTRATION | (2) MASS | (1) CONCENTRATION | (2) MASS | (1) CONCENTRATION | (2) MASS | | | | | | | |
| A. Biochemical Oxygen Demand, 5-day (BOD ₅) | | | | | | | | | | | | | |
| B. Chemical Oxygen Demand (COD) | | | | | | | | | | | | | |
| C. Total Organic Carbon (TOC) | | | | | | | | | | | | | |
| D. Total Suspended Solids (TSS) | | | | | | | | | | | | | |
| E. Ammonia as N | | | | | | | | | | | | | |
| F. Flow | VALUE | | VALUE | | VALUE | | VALUE | | MILLIONS OF GALLONS PER DAY (MGD) | | | | |
| G. Temperature (winter) | VALUE | | VALUE | | VALUE | | VALUE | | °F | | | | |
| H. Temperature (summer) | VALUE | | VALUE | | VALUE | | VALUE | | °F | | | | |
| I. pH | MINIMUM | | MAXIMUM | | AVERAGE | | | | STANDARD UNITS (SU) | | | | |
| 3.0 PART B - Mark "X" in column 2A for each pollutant you know or have reason to believe is present. Mark "X" in column 2B for each pollutant you believe to be absent. If you mark Column 2A for any pollutant, you must provide the results for at least one analysis for the pollutant. Complete one table for each outfall (intake). Provide results for additional parameters not listed here in Part 3.0 C. | | | | | | | | | | | | | |
| 3. VALUES | | | | | | | | | | | | | |
| 1. POLLUTANT AND CAS NUMBER (if available) | 2. MARK "X" | | A. MAXIMUM DAILY VALUE | | | | B. MAXIMUM 30 DAY VALUES | | C. LONG TERM AVERAGE VALUES | | D. NO. OF ANALYSES | 4. UNITS | |
| | A. BELIEVED PRESENT | B. BELIEVED ABSENT | CONCENTRATION | MASS | CONCENTRATION | MASS | CONCENTRATION | MASS | CONCENTRATION | MASS | | A. CONCEN-TRATION | B. MASS |
| Subpart 1 - Conventional and Non-Conventional Pollutants | | | | | | | | | | | | | |
| A. Alkalinity (CaCO ₃) | | | MINIMUM | | | | MINIMUM | | | | | | |
| B. Bromide (24959-67-9) | | | | | | | | | | | | | |
| C. Chloride (16887-00-6) | | | | | | | | | | | | | |
| D. Chlorine, Total Residual | | | | | | | | | | | | | |
| E. Color | | | | | | | | | | | | | |
| F. Conductivity | | | | | | | | | | | | | |
| F. Cyanide, Amenable to Chlorination | | | | | | | | | | | | | |

| 1. POLLUTANT AND CAS NUMBER (if available) | 2. MARK "X" | | 3. VALUES | | | | | | 4. UNITS | | |
|--|------------------------|--------------------------|------------------------|------|-------------------------|------|----------------------------|------|-----------------------|-----------------------|---------|
| | A. BELIEVED PRESENT | B. BELIEVED ABSENT | A. MAXIMUM DAILY VALUE | | B. MAXIMUM 30 DAY VALUE | | C. LONG TERM AVERAGE VALUE | | D. NO. OF ANALYSES | A. CONCEN- TRATION | B. MASS |
| | | | CONCENTRATION | MASS | CONCENTRATION | MASS | CONCENTRATION | MASS | | | |
| Subpart 1 – Conventional and Non-Conventional Pollutants (Continued) | | | | | | | | | | | |
| G. <i>E. coli</i> | | | | | | | | | | | |
| H. Fluoride (16984-48-8) | | | | | | | | | | | |
| I. Nitrate plus Nitrate (as N) | | | | | | | | | | | |
| J. Kjeldahl, Total (as N) | | | | | | | | | | | |
| K. Nitrogen, Total Organic (as N) | | | | | | | | | | | |
| L. Oil and Grease | | | | | | | | | | | |
| M. Phenols, Total | | | | | | | | | | | |
| N. Phosphorus (as P), Total (7723-14-0) | | | | | | | | | | | |
| O. Sulfate (as SO ⁴) (14808-79-8) | | | | | | | | | | | |
| P. Sulfide (as S) | | | | | | | | | | | |
| Q. Sulfite (as SO ³) (14285-45-3) | | | | | | | | | | | |
| R. Surfactants | | | | | | | | | | | |
| S. Trihalomethanes, Total | | | | | | | | | | | |
| Subpart 2 – Metals | | | | | | | | | | | |
| 1M. Aluminum, Total Recoverable (7429-90-5) | | | | | | | | | | | |
| 2M. Antimony, Total Recoverable (7440-36-9) | | | | | | | | | | | |
| 3M. Arsenic, Total Recoverable (7440-38-2) | | | | | | | | | | | |
| 4M. Barium, Total Recoverable (7440-39-3) | | | | | | | | | | | |
| 5M. Beryllium, Total Recoverable (7440-41-7) | | | | | | | | | | | |
| 6M. Boron, Total Recoverable (7440-42-8) | | | | | | | | | | | |
| 7M. Cadmium, Total Recoverable (7440-43-9) | | | | | | | | | | | |
| 8M. Chromium III Total Recoverable (16065-83-1) | | | | | | | | | | | |
| 9M. Chromium VI, Dissolved (18540-29-9) | | | | | | | | | | | |
| 10M. Cobalt, Total Recoverable (7440-48-4) | | | | | | | | | | | |

| 1. POLLUTANT AND CAS NUMBER (if available) | 2. MARK "X" | | 3. VALUES | | | | | | 4. UNITS | | |
|--|------------------------|--------------------------|------------------------|------|-------------------------|------|----------------------------|------|-----------------------|-----------------------|---------|
| | A. BELIEVED PRESENT | B. BELIEVED ABSENT | A. MAXIMUM DAILY VALUE | | B. MAXIMUM 30 DAY VALUE | | C. LONG TERM AVERAGE VALUE | | D. NO. OF ANALYSES | A. CONCEN- TRATION | B. MASS |
| | | | CONCENTRATION | MASS | CONCENTRATION | MASS | CONCENTRATION | MASS | | | |
| Subpart 2 – Metals (Continued) | | | | | | | | | | | |
| 11M. Copper, Total Recoverable (7440-50-8) | | | | | | | | | | | |
| 12M. Iron, Total Recoverable (7439-89-6) | | | | | | | | | | | |
| 13M. Lead, Total Recoverable (7439-92-1) | | | | | | | | | | | |
| 14M. Magnesium, Total Recoverable (7439-95-4) | | | | | | | | | | | |
| 15M. Manganese, Total Recoverable (7439-96-5) | | | | | | | | | | | |
| 16M. Mercury, Total Recoverable (7439-97-6) | | | | | | | | | | | |
| 17M. Methylmercury (22967926) | | | | | | | | | | | |
| 18M. Molybdenum, Total Recoverable (7439-98-7) | | | | | | | | | | | |
| 19M. Nickel, Total Recoverable (7440-02-0) | | | | | | | | | | | |
| 20M. Selenium, Total Recoverable (7782-49-2) | | | | | | | | | | | |
| 21M. Silver, Total Recoverable (7440-22-4) | | | | | | | | | | | |
| 22M. Thallium, Total Recoverable (7440-28-0) | | | | | | | | | | | |
| 23M. Tin, Total Recoverable (7440-31-5) | | | | | | | | | | | |
| 24M. Titanium, Total Recoverable (7440-32-6) | | | | | | | | | | | |
| 25M. Zinc, Total Recoverable (7440-66-6) | | | | | | | | | | | |
| Subpart 3 – Radioactivity | | | | | | | | | | | |
| 1R. Alpha Total | | | | | | | | | | | |
| 2R. Beta Total | | | | | | | | | | | |
| 3R. Radium Total | | | | | | | | | | | |
| 4R. Radium 226 plus 228 Total | | | | | | | | | | | |

**INSTRUCTIONS FOR FILLING OUT APPLICATION FOR NPDES DISCHARGE PERMIT – FORM C –
MANUFACTURING, COMMERCIAL, MINING, SILVICULTURE OPERATIONS, PROCESS WASTEWATER, NON-
PROCESS WASTEWATER, AND INDUSTRIAL STORMWATER DISCHARGES.**

All applicable sections must be filled in when the application is submitted. The form must be signed as indicated. This application is to be completed only for facilities with a discharge. Non-discharging (land application facilities) should fill out the appropriate forms for the activity. Include any area with potential discharge, even if there is normally no discharge. If this form is not adequate for you to describe your existing operations, then sufficient information should be attached so an evaluation of the discharges can be made. Attach additional sheets as necessary for any additional information. If an applicant believes previous outfalls are no longer applicable to the facility, please indicate so. Certain parts of the application may be submitted electronically, such as extensive analytical data, or project plans relating to improvements. This may be included using a thumb drive or CD. If extensive data is submitted without an electronic copy, the department may request the submission at a later time so the permit writer can mathematically evaluate the data. If you have any questions regarding this form please contact the Water Protection Program Operating Permits Administrative Assistant at 800-361-4827 or 573-571-6825 and you will be directed to a permit writer.

GENERAL INFORMATION

1.0 Name of Facility – By what title or name is this facility known? Has the official name changed? Please indicate both the previous and current name you wish to be listed on the permit.


1.1 Operating permit number as assigned (MO-#####)

1.2 Indicate if this is a new facility or if there are any new discharges. Has the facility completed an antidegradation review? Is this facility being moved from a general permit to a site specific permit? If so, indicate general permit number.

1.3 Self-explanatory.

FLOWS, TYPE, AND FREQUENCY

2.0 The line drawing should show the route taken by water in your facility from intake to discharge. Show all operations contributing wastewater, including process and production areas, sanitary flows, cooling water, and stormwater runoff. Indicate any alternate treatment trains available. You may group similar operations into a single unit labeled to correspond to the more detailed listing. More than one drawing may be required depending on the complexity of the system. The water balance should show average and maximum flows. Show all significant losses of water to: products, atmosphere, public sewer systems; both storm sewer and sewer. You should use actual measurements whenever available; otherwise, use your best estimate. An example of an acceptable line drawing appears below.

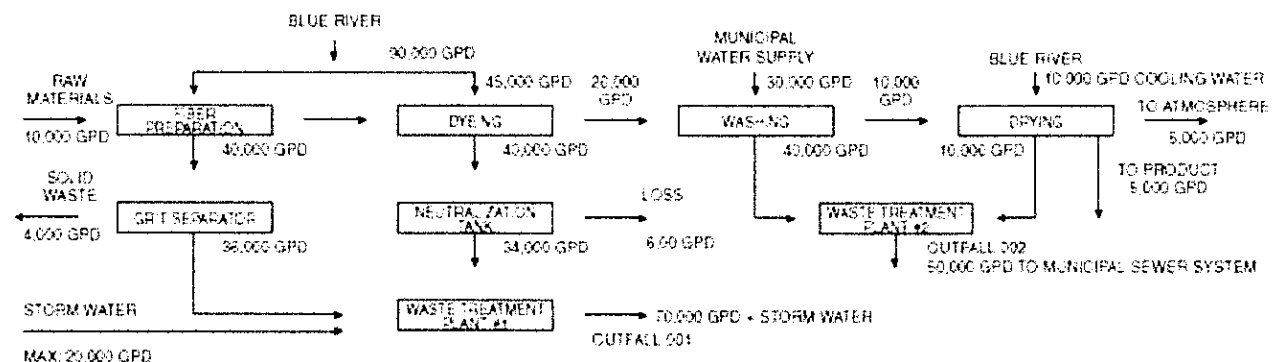

2.1 List all sources of wastewater to each outfall. Operations may be described in general terms (for example, "dye-making reactor" or a "distillation tower"). You may estimate the flow contributed by each source if no data is available, and for stormwater, you may use any reasonable measure of duration, volume, or frequency. For each treatment unit, indicate its size, flow rate, and retention time, and describe the ultimate disposal of any solid or liquid wastes not discharged. Treatment units should be listed in order and you should select the proper code from Table A to fill in column 3B for each treatment unit. Insert "XX" into column 3B if no code corresponds to a treatment unit you list.

TABLE A – CODES FOR TREATMENT UNITS

| PHYSICAL TREATMENT PROCESSES | | | |
|---|---------------------------------|-----|------------------------------------|
| 1-A | Ammonia Stripping | 1-M | Grit Removal |
| 1-B | Dialysis | 1-N | Microstraining |
| 1-C | Diatomaceous Earth Filtration | 1-O | Mixing |
| 1-D | Distillation | 1-P | Moving Bed Filters |
| 1-E | Electrodialysis | 1-Q | Multimedia Filtration |
| 1-F | Evaporation | 1-R | Rapid Sand Filtration |
| 1-G | Flocculation | 1-S | Reverse Osmosis (Hyper Filtration) |
| 1-H | Flotation | 1-T | Screening |
| 1-I | Foam Fractionation | 1-U | Sedimentation (Settling) |
| 1-J | Freezing | 1-V | Slow Sand Filtration |
| 1-K | Gas-Phase Separation | 1-W | Solvent Extraction |
| 1-L | Grinding (Comminutors) | 1-X | Sorption |
| CHEMICAL TREATMENT PROCESSES | | | |
| 2-A | Carbon Absorption | 2-G | Disinfection (Ozone) |
| 2-B | Chemical Oxidation | 2-H | Disinfection (Other) |
| 2-C | Chemical Precipitation | 2-I | Electrochemical Treatment |
| 2-D | Coagulation | 2-J | Ion Exchange |
| 2-E | Dechlorination | 2-K | Neutralization |
| 2-F | Disinfection (Chlorine) | 2-L | Reduction |
| BIOLOGICAL TREATMENT PROCESSES | | | |
| 3-A | Activated Sludge | 3-E | Pre-Aeration |
| 3-B | Aerated Lagoons | 3-F | Spray Irrigation/Land Application |
| 3-C | Anaerobic Treatment | 3-G | Stabilization Ponds |
| 3-D | Nitrification-Denitrification | 3-H | Trickling Filtration |
| OTHER PROCESSES | | | |
| 4-A | Discharge to Surface Water | 4-C | Reuse/Recycle of Treated Effluent |
| 4-B | Ocean Discharge Through Outfall | 4-D | Underground Injection |
| SLUDGE TREATMENT AND DISPOSAL PROCESSES | | | |
| 5-A | Aerobic Digestion | 5-M | Heat Drying |
| 5-B | Anaerobic Digestion | 5-N | Heat Treatment |
| 5-C | Belt Filtration | 5-O | Incineration |
| 5-D | Centrifugation | 5-P | Land Application |
| 5-E | Chemical Conditioning | 5-Q | Landfill |
| 5-F | Chlorine Treatment | 5-R | Pressure Filtration |
| 5-G | Composting | 5-S | Pyrolysis |
| 5-H | Drying Beds | 5-T | Sludge Lagoons |
| 5-I | Elutriation | 5-U | Vacuum Filtration |
| 5-J | Flotation Thickening | 5-V | Vibration |
| 5-K | Freezing | 5-W | Web Oxidation |
| 5-L | Gravity Thickening | | |

2.2 A discharge is intermittent unless it occurs without interruption during the operating hours of the facility, except for infrequent shutdowns for maintenance, process changes, or other similar activities. A discharge is seasonal if it occurs only during certain parts of the year. Fill in every applicable column in this item for each source of intermittent or seasonal discharges. Base your answers on actual data whenever available; otherwise, provide your best estimate. Report the highest daily value for flow rate and total volume in the "Maximum Daily" columns. Report the average of all daily values measures during days when discharge occurred within the last year in the "Long Term Average" columns.

PRODUCTION

2.3 A. All effluent limitation guidelines (ELGs) promulgated by EPA appear in the Federal Register and are published annually in 40 CFR Subchapter N (400-499). A guideline applies to you based on the applicability sections within each subpart. If you are unsure you are covered by an ELG, check with your Missouri Department of Natural Resources' Regional Office. You must check yes if an applicable effluent guideline has been promulgated, even if the guideline limitations are being contested in court. If you believe a promulgated effluent guideline has been remanded for reconsideration by a court and does not apply to your operations, you may check no. The ELG number and subpart(s) must be included.

2.3 B. An ELG is expressed in terms of production (or other measure of operation) if the limitations are expressed as mass of pollutant per operational parameter; for example, "pounds of BOD per cubic foot of logs from which bark is removed," or "pounds of TSS per megawatt hour of electrical energy consumed by smelting furnace." An example of a guideline not expressed in terms of a measure of operation is one which limits the concentration of pollutants, or requires no discharge of the wastewater.

2.3 C. This item must be completed if you checked "yes" to item B. The production information requested here is necessary to apply effluent guidelines to your facility and you may not claim it as confidential. However, you do not have to indicate how the reported information was calculated. Report quantities and the units of measurement used in the applicable effluent guideline. The data provided must be a measure of actual operation over a one month period, such as the production for the highest month during the last twelve months, or the monthly average production for the highest year of the last five years, or other reasonable measure of actual operation, but may not be based on design capacity or on predictions of future increases in operation. This data must be concurrent of facility operations.

2.4 IMPROVEMENTS If you check yes to this question, complete all parts of the table, or attach a copy of any previous submission you have made containing the same information. You are not required to submit a description of future pollution control projects if you do not wish to, or if none are planned.

2.5 SLUDGE MANAGEMENT If the facility generates any sludge or biosolids, please indicate where the sludge accumulates (lagoon, tank, etc.) and the methods of disposal. Please include the volume and frequency of sludge removal/disposal and any haulers used. Please indicate if the facility composts, incinerates, landfills, stores, sells, or other methods of eliminating the sludge from lagoons or holding tanks. Consider submitting a sludge or biosolids management plan electronically if additional description is needed.

DATA COLLECTION AND REPORTING REQUIREMENTS FOR APPLICANTS

3.0 This section requires collection and reporting of data on pollutants discharged from each outfall, including stormwater outfalls, non-process wastewater, and any intake data you wish to provide. Parts A, B, and C address different sets of pollutants and must be completed in accordance with the specific instructions for the part. All data must be reported as a concentration **and** as total mass. You may report some or all of the required data by attaching separate sheets of paper.

3.0 A. and B. These sections are found on Table 1. Complete a separate table for each outfall and intake.

3.0 A. Requires reporting at least one analysis for each pollutant. Part A must be completed by all applicants for all outfalls, including outfalls containing only noncontact cooling water, stormwater runoff, or other discharges; intake values are not required in this Part. Upon written request, (email is suitable) prior to submitting the application, the department may waive the requirements to test for one or more of these pollutants upon determining testing for the pollutant(s) is not applicable for your effluent.

3.0 B. Mark "X" in either "Believed Present", Column 2A, or "Believed Absent", Column 2B, for each pollutant, based on your best estimate, and test those you believe present. Base your determination a pollutant is present in, or absent from, your discharge on your knowledge of your raw materials, source water, maintenance chemicals, intermediate, byproduct, and final products, and any previous analyses known to you of the facility's effluent, or of any similar effluent. If either chloride or sulfate is believed present, the department asks you to test for both chloride and sulfate. If you expect a pollutant is present as a result your intake water, you should mark "Believed Present" and analyze for the pollutant. Provide analysis of the intake or source water as well; this includes water withdrawn from wells or obtained from a potable water source. Presence of a pollutant in the discharge from sourced water does not eliminate disclosure requirements. If a

pollutant is reported as not present, the pollutant will be considered "believed absent" for the purposes of application shield.

3.0 A and B Continued

Use the following abbreviations (or other as applicable) in Column 4, "Units". Mass must be specified as per day, month, or year.

| CONCENTRATION | | MASS | |
|---------------|----------------------|------|----------------------|
| ppm | parts per million | lbs | pounds |
| mg/L | milligrams per liter | ton | tons (English tons) |
| ppb | parts per billion | mg | Milligrams |
| ug/L | micrograms per liter | g | grams |
| pCi/L | picocuries per liter | kg | kilograms |
| | | T | tonnes (metric tons) |

MAXIMUM DAILY VALUE. If you measure a pollutant only once, complete only the "Maximum Daily Value" columns and insert "1" into the "number of analyses" in Column D. The Missouri Department of Natural Resources may require you to conduct additional analyses to further characterize your discharge. If the pollutant is sampled but not detected, a less than "<" symbol should be used next to the detection limit (or laboratory reporting limit). Simply stating "below detection limits" without quantifying the limit of detection may not be appropriate and additional information may be required.

MAXIMUM 30 DAY VALUES. "Maximum 30 Day Values" are not compulsory but should be filled out if data is available. The department suggests at least 4 samples (one per week) be collected over a one month period for averaging purposes, but is not required. Determine the average of all daily values taken during one calendar month, and report the highest average of all daily values taken during all calendar months, and report the highest average in Column B. Column D must show the number of samples used in the calculation.

LONG TERM AVERAGES. "Long Term Average Values" are not compulsory but should be filled out if data is available. Determine the long term average of all the data and report in Column C. Column D must show the number of samples used in the calculations. The facility should include a statement describing the timeframe of the data used in the calculations. Consider including an electronic copy of the data with the application.

SAMPLING. The collection of samples for analyses should be supervised by a person experienced in performing sampling of industrial wastewater and/or stormwater. You may contact your Missouri Department of Natural Resources' Regional Office for detailed guidance on sampling techniques and for answers to specific questions. Any specific requirements contained in the applicable analytical methods should be followed for sample containers, sample preservation, holding times, the collection of duplicate or blank samples, etc. The time when you sample should be representative of your normal operation, with all processes contributing wastewater in normal operation, and with your treatment system operating properly with no system upsets. Samples should be collected from the center of the flow channel, at a site specified in your present permit, or for new discharges, at any site adequate for the collection of a representative sample.

GRAB SAMPLE. An individual sample of sufficient volume for analysis, collected at a randomly selected time, over a period not exceeding 15 minutes, which is representative of the discharge. Grab samples must be used for temperature, pH, total residual chlorine, oil and grease, *E. coli*, and any pollutant considered to be volatile. Grab samples are typically appropriate for stormwater.

COMPOSITE SAMPLE. Use composite sampling (if available) for all pollutants (except above). A combination of at least eight sample aliquots of at least 100 milliliters, collected at periodic intervals during the operating hours of a facility over a 24 hour period. For volatile pollutants, aliquots must be combined in the laboratory immediately before analysis. The composite must be proportional; either time interval proportional, or flow proportional. Aliquots may be collected manually or automatically.

ANALYSIS. You must use test methods promulgated in 40 CFR Part 136 for all analyses. The facility must use a sufficiently sensitive method to determine compliance with Missouri Water Quality Standards in accordance with Standard Conditions Part I. If no method has been promulgated for a particular pollutant, you may use any suitable method for measuring the level of the pollutant in your discharge. If there is no promulgated method, your attached description should include the preservation techniques, sample holding times, the quality control measures which you used, and any other

pertinent information, such as filtering or what fraction the method detects. For obscure methods or new contaminants, consider including an electronic copy of the method with the application and the laboratory analysis sheets.

IDENTICAL OUTFALL CONSIDERATION. If you have two or more substantially identical outfalls, you may submit the results of the analysis for one substantially identical outfall in its place. Identify which outfall you did test and describe why the outfalls which you did not test are substantially identical to the outfall you did test.

REPORTING OF INTAKE DATA. You are not required to report intake data unless you wish apply for "net" effluent limitations for one or more pollutants. Net limitations are technology limits adjusted by subtracting the level of the pollutant present in the intake water from the discharge. National Pollutant Discharge Elimination System (NPDES) regulations allow net limitations only in certain circumstances. To demonstrate eligibility, report the maximum and average of the results of analyses on the intake water, attach a statement the intake water is drawn from the same body of water into which the discharge is made, and a statement how the pollutant level is reduced by the wastewater treatment. When applicable, a demonstration to the extent the pollutants in the intake vary physically, chemically, or biologically from the pollutants contained in the discharge; for example, when the pollutant represents a class of compounds.

3.0. C. requires listing any pollutants from "TABLE B – TOXIC POLLUTANTS AND HAZARDOUS SUBSTANCES REQUIRED TO BE IDENTIFIED BY APPLICANTS IF EXPECTED TO BE PRESENT" you believe to be present and explain why you believe them to be present. If you have analytical data, you must report it. You may include other pollutants not listed below but present in your discharge in 3.0 C. Please provide Chemical Abstract Service (CAS) numbers for any additional pollutants described. If the facility is required to complete Form D, duplication of the parameters here is not required.

| TABLE B – TOXIC POLLUTANTS AND HAZARDOUS SUBSTANCES REQUIRED TO BE IDENTIFIED BY APPLICANTS IF EXPECTED TO BE PRESENT | | |
|---|----------------------|---|
| TOXIC POLLUTANT | HAZARDOUS SUBSTANCES | HAZARDOUS SUBSTANCES |
| Asbestos | Dimethylamine | Napthenic acid |
| HAZARDOUS SUBSTANCES | Dintrobenzene | Nitrotoluene |
| Acetaldehyde | Diquat | Parathion |
| Allyl alcohol | Disulfoton | Phenolsulfonate |
| Allyl chloride | Diuron | Phosgene |
| Amyl acetate | Epichlorohydrin | Propargite |
| Aniline | Ethion | Propylene oxide |
| Benzonitrile | Ethylene diamine | Pyrethrins |
| Benzyl chloride | Ethylene dibromide | Quinoline |
| Butyl acetate | Formaldehyde | Resorcinol |
| Butylamine | Furfural | Strontium |
| Captan | Guthion | Strychnine |
| Carbaryl | Isoprene | Sytrene |
| Carbofuran | Isopropanolamine | 2,4,5-T (2,4,5-Trichloro-phenoxyacetic acid) |
| Carbon disulfide | Kelthane | TDE (Tetrachlorodiphenyl ethane) |
| Chlorpyrifos | Kepone | 2, 4, 5-TP (2-(2,4,5-Trichloro-phenoxy) propanoic acid) |
| Coumaphos | Malathion | Trichlorofon |
| Cresol | Mercaptodimethur | Triethanolamine |
| Crotonaldehyde | Methoxychlor | Triethaylamine |
| 2,4-D (2,4-Dichloro-Phenoxyacetic acid) | Methyl mercaptan | Uranium |
| Diazinon | Methyl parathion | Vanadium |
| Dicamba | Mevinphos | Vinyl acetate |
| Dichlobenil | Mexacarbate | Xylene |
| 2,2-Dichloropropionic acid | Monethyl amine | Xylenol |
| Dichlorvos | Monomethyl amine | Zirconium |
| Diethylamine | Nalad | |

3.1 Self-explanatory.

3.2 Self-explanatory.

4.0 STORMWATER [10 CSR 20-6.200(2)(C)1.]

In accordance with 10 CSR 20-6.200(2)(C)1.E(I) and (II), the facility must sample the stormwater for any pollutant listed in the permit for process wastewater discharges and/or the applicable Effluent Limitation Guideline. All industrial stormwater must be sampled for parameters listed in 10 CSR 20-6.200(2)(C)1.E.(III); these are: oil and grease, pH, biochemical oxygen demands (BOD₅), chemical oxygen demands (COD), total suspended solids (TSS), conductivity, total phosphorus, total Kjeldahl nitrogen, and nitrate plus nitrite nitrogen.

4.1 Indicate the outfall numbers for industrial stormwater discharges. Provide the area drained by each outfall. Indicate the type and percentages of surface(s), for example: 60% grass or vegetated areas, 10% non-vegetated soils, 30% pavement, etc., the outfall drains. The facility must indicate any structural best management practices, such as settling/retention, rain garden/infiltration, filter socks, etc, employed at each outfall.

4.2 Describe the method used to determine the flow rate in accordance with 10 CSR 20-6.200(2)(C)1., and the flow rate; submit the date and duration of the storm event from which the samples were taken.

5.0 SIGNATORY REQUIREMENTS The Clean Water Act provides for severe penalties for submitting false information on this application form. Section 309(c)(2) of the Clean Water Act provides "Any person who knowingly makes any false statement, representation, or certification in any application . . . shall upon conviction, be punished by a fine of no more \$10,000 or by imprisonment for not more than six months, or both.

All applications must be signed as follows and the signature must be original. For a corporation: by an officer having responsibility for the overall operation of the regulated facility or activity or for environmental matters. For a partnership or sole proprietorship: by a general partner or the proprietor. For a municipal, state, federal or other public facility: by either a principal executive officer or by an individual having overall responsibility for environmental matters at the facility.